



RECYCLED PAPER

CARING FOR THE FUTURE

**PRICE
LIST 50Hz
45.2021**

SIBA

DAB
WATER • TECHNOLOGY

**CARING
FOR THE
FUTURE**



It's not just a matter of talking about performance or technical features, or even stating that we are better than the competition.

We really need to start from people; from users. And if we give them something that can simplify or improve their lives, then they will be happy to follow us.





D+CONNECT AFFORDABLE WEB BASED REMOTE CONTROL FOR EVERYONE

DConnect is the new DAB cloud service that allows you to remotely control your installations, in real time and wherever you are.

INTERNETOFPUMPS.COM



READY TO USE



ALWAYS CONNECTED



CLOSE TO THE CUSTOMER



LEARNING ONLINE TRAINING



VA

WET ROTOR CIRCULATORS



Single body consisting of a cast iron hydraulic unit. Die-cast aluminium motor casing. Technopolymer impeller. Alumina driving shaft mounted on graphite brushings lubricated by the pumped liquid itself. Stainless steel protective rotor sleeve, stator sleeve and closing flange. Ceramic thrust bearing, E.P.D.M. O-rings and brass air outlet cap. The two-pole asynchronous motor with wet rotor is self-protected for resistance.

No overload protection required. Three-speed operation.

Operating range

from 0.5 to 3,6 m³/h with head up to 6 metres.

Liquid temperature range

from -10°C to +110°C.

Pumped liquid characteristics

clean, free from solids and mineral oils, non viscous, chemically neutral, close to the characteristics of water (max 30% glycol).

Maximum working pressure

10 bar (1000 kPa).

Protection level corresponding to IP 44

Insulation class F

Cable grommet PG 11

Installation with motor axis horizontal.

Only for extra EU markets. Please contact our sales network for more information

ONLY FOR
EXTRA EU
MARKETS

ACCESSORIES
PAG. 83

VA SINGLE WITH UNIONS

MODEL	CODE	PRICE €	CENTRE DISTANCE mm	PUMP COUPLINGS	ELECTRICAL DATA			ENERGY CLASS	HYDRAULIC DATA							WEIGHT KG	Q.TY x PALLET	
					VOLTAGE 50 Hz	P1 MAX W	In A		Q m ³ /h l/min	0	0,6	1,2	1,8	2,4	3			4,2
VA 25/130	60182197	150	130	1 1/2" G	1x230 V	43	0,19	B	H (m)	2,71	2,45	2,15	1,75	1,2	0,6		2,7	240
VA 25/180	60182196	150	180	1 1/2" G	1x230 V	43	0,19	B		2,71	2,45	2,15	1,75	1,2	0,6		2,8	180
VA 25/180 X	60182195	155	180	2" G	1x230 V	43	0,19	B		2,71	2,45	2,15	1,75	1,2	0,6		2,9	180
VA 35/130	60182186	152	130	1 1/2" G	1x230 V	56	0,25	B		4,3	3,9	3,4	2,8	2,15	1,4		2,7	240
VA 35/130 1/2"	60182184	152	130	1" G	1x230 V	56	0,25	B		4,3	3,9	3,4	2,8	2,15	1,4		2,6	240
VA 35/180	60182183	152	180	1 1/2" G	1x230 V	56	0,25	B		4,3	3,9	3,4	2,8	2,15	1,4		2,8	180
VA 35/180 X	60182180	158	180	2" G	1x230 V	56	0,25	B		4,3	3,9	3,4	2,8	2,15	1,4		2,9	180
VA 55/130	60182179	158	130	1 1/2" G	1x230 V	70	0,30	B		5,4	4,7	4,5	3,3	2,6	1,75	0,85	2,7	240
VA 55/130 1/2"	60182175	158	130	1" G	1x230 V	70	0,30	B		5,4	4,7	4,5	3,3	2,6	1,75	0,85	2,6	240
VA 55/180	60182171	158	180	1 1/2" G	1x230 V	70	0,30	B		5,4	4,7	4,5	3,3	2,6	1,75	0,85	2,8	180
VA 55/180 X	60182170	163	180	2" G	1x230 V	70	0,30	B		5,4	4,7	4,5	3,3	2,6	1,75	0,85	2,9	180
VA 65/130	60182169	162	130	1 1/2" G	1x230 V	78	0,34	C		6,3	5,8	5,3	4,3	3,4	2,4		2,7	240
VA 65/130 1/2"	60182168	162	130	1" G	1x230 V	78	0,34	C	6,3	5,8	5,3	4,3	3,4	2,4		2,6	240	
VA 65/180	60181676	162	180	1 1/2" G	1x230 V	78	0,34	C	6,3	5,8	5,3	4,3	3,4	2,4		2,7	180	
VA 65/180 X	60182167	167	180	2" G	1x230 V	78	0,34	C	6,3	5,8	5,3	4,3	3,4	2,4		2,9	180	

Fiyatlara KDV dahil değildir.

A - B - D

WET ROTOR CIRCULATORS



Pump body in cast iron and motor casing in die-cast aluminium. Technopolymer impeller and tempered stainless steel driving shaft mounted on graphite brushings lubricated by the pumped liquid itself. Flanged vents, (threaded series A), provided with threaded connectors for controlling gauges. Stainless steel protective rotor sleeve, stator sleeve and closing flange. Ceramic thrust bearing, E.P.D.M. "O" rings and brass air outlet cap. The two-pole asynchronous motor with wet rotors designed for **three-speed** operation, single-phase version, for **two-speed** operation, for three-phase version. Thermal overload protection incorporated in the single phase version. In the twin version an automatic clapet type valve and blank flange are provided.

Operating range

from 1 to 12 m³/h with head up to 11 metres.

Liquid temperature range

from -10°C to +110°C.

Pumped liquid characteristics clean, free from solids and mineral oils, not viscous, chemically neutral, close to the characteristics of water (max 30% glycol).

Maximum working pressure 10 bar (1000 kPa).

Protection level IP 44

Insulation class F

Cable grommet PG 11

Installation with motor axis horizontal.

Only for extra EU markets. Please contact our sales network for more information

ONLY FOR
EXTRA EU
MARKETS

ACCESSORIES
PAG. 83

A SINGLE WITH UNIONS

MODEL	CODE	PRICE €	CENTRE DISTANCE mm	PUMP COUPLINGS	ELECTRICAL DATA			HYDRAULIC DATA											WEIGHT KG	Q.TY X PALLET
					VOLTAGE 50 Hz	P1 MAX W	In A	Q m ³ /h l/min	0	0,6	1,2	1,8	2,4	3	4,2	7,2	12			
A 50/180 M	505803001	311	180	11/2"G	1 x 230 V ~	195	0,95	H (m)	5,7	5,6	5,4	5,3	5,1	4,8	4,2	2,6		5,3	115	
A 50/180 XM	505802041	319	180	2"G	1 x 230 V ~	189	0,92		5,7	5,6	5,4	5,3	5,1	4,8	4,2	2,6		5,0	115	
A 50/180 T	505803601	370	180	11/2"G	3x400 V ~	197	0,52		5,6	5,6	5,6	5,5	5,43	5,4	4,9	2,8		5,2	115	
A 50/180 XT	505802671	379	180	2"G	3x400 V ~	201	0,50		5,9	5,85	5,8	5,6	5,5	5,2	4,6	2,9		5,3	115	
A 56/180 M	505805001	341	180	11/2"G	1 x 230 V ~	287	1,30		6,35	6,3	6,2	6,18	6	5,9	5,5	4,2	1,2	5,3	115	
A 56/180 XM	505804041	349	180	2"G	1 x 230 V ~	294	1,32		6,35	6,3	6,2	6,18	6	5,9	5,5	4,2	1,2	5,3	115	
A 56/180 T	505805601	400	180	11/2"G	3x400 V ~	294	0,60		6,42	6,42	6,41	6,4	6,4	6,4	6,1	4,8		5,3	115	
A 56/180 XT	505804671	410	180	2"G	3x400 V ~	291	0,60		6,4	6,3	6,2	6,1	6	5,9	5,7	4,4		5,2	115	
A 80/180 M	505807001	354	180	11/2"G	1 x 230 V ~	264	1,15		8,25	8	7,6	7,4	7,2	6,9	6,3	3,8		5,3	115	
A 80/180 XM	505806041	361	180	2"G	1 x 230 V ~	260	1,17		8,25	8	7,6	7,4	7,2	6,9	6,3	3,8		5,3	115	
A 80/180 T	505807601	415	180	11/2"G	3x400 V ~	271	0,57		8,2	7,9	7,6	7,3	7	6,8	6,1	3,7		5,3	115	
A 80/180 XT	505806671	423	180	2"G	3x400 V ~	272	0,57		8,2	7,9	7,6	7,3	7	6,8	6,1	3,7		5,2	115	
A 110/180 M	505808001	448	180	11/2"G	1 x 230 V ~	410	1,77		11,3	11	10,8	10,5	10	9,8	8,9	6,7		5,3	54	
A 110/180 XM	505809001	457	180	2"G	1 x 230 V ~	410	1,77		11,3	11	10,8	10,5	10	9,8	9,2	7	1,7	5,3	54	
A 110/180 T	505808601	512	180	11/2"G	3x400 V ~	403	0,90		11,3	11	10,8	10,5	10	9,8	8,9	6,6		5,2	54	
A 110/180 XT	505809601	521	180	2"G	3x400 V ~	403	0,90		11,3	11	10,8	10,5	10	9,8	9,2	7	1,6	5,2	54	

Fiyatlara KDV dahil değildir.

EVOPLUS SMALL SAN

ELECTRONIC CIRCULATORS FOR HEATING AND AIR-CONDITIONING SYSTEMS



Circulator for domestic hot water systems of the closed circuit pressurized type or open circuit type. Bronze pump body. Motor casing in die-cast aluminium. Technopolymer impeller. Ceramic motor shaft mounted on graphite bushings lubricated by the pumped liquid. Stainless steel rotor sleeve, stator sleeve and closing flange. Ceramic thrust ring, ethylene propylene sealing rings. Synchronous motor with permanent magnet rotor.

Operating range

from 2 to 12 m³/h with head up to 11 meters.

Liquid temperature range

from -10 °C to 110 °C.

Pumped liquid clean, free from solids and mineral oils, not viscous, chemically neutral, close to the properties of water.

Maximum working pressure

16 bar (1600 kPa).

Protection rating

IP 44.

Insulation class

F.

Installation with horizontal motor shaft.

EVOPLUS⁺



ONLINE TRAINING



PAG.9

ACCESSORIES
PAG. 83

SINGLE UNIONS

MODEL	CODE	PRICE €	CENTRE DISTANCE mm	PUMP COUPLINGS	UNIONS ON REQUEST		ELECTRICAL DATA			HYDRAULIC DATA							WEIGHT Kg	
					STANDARDISED	SPECIAL	VOLTAGE 50/60 Hz	P1 MAX W	In A	Q m ³ /h l/min	0	2,4	3	4,2	5,4	7,2		9,6
											0	40	50	70	90	120		160
EVOPLUS 40/180 SAN M	60151144	788	180	1" ½	1" F	1/2" F - 3/4" F - UNION KIT TO BE WELDED Ø 22 / Ø 28	220/240 V	70	0,52	H (m)	4,2	4,2	4	3,1	2,4			4,5
EVOPLUS 60/180 SAN M	60151145	853	180	1" ½	1" F	1/2" F - 3/4" F - UNION KIT TO BE WELDED Ø 22 / Ø 28	220/240 V	100	0,72		6,1	6,1	5,8	4,6	3,4			4,5
EVOPLUS 80/180 SAN M	60151146	928	180	1" ½	1" F	1/2" F - 3/4" F - UNION KIT TO BE WELDED Ø 22 / Ø 28	220/240 V	135	0,95		8,2	8,2	7,7	6,2	4,8	2,9		4,5
EVOPLUS 110/180 SAN M	60151147	1.005	180	1" ½	1" F	1/2" F - 3/4" F - UNION KIT TO BE WELDED Ø 22 / Ø 28	220/240 V	170	1,16		11,1	10,1	9,2	7,5	5,9	3,9		4,5

SINGLE WITH FLANGES

	MODEL	CODE	PRICE €	CENTRE DISTANCE mm	UNIONS ON REQUEST	ELECTRICAL DATA			Q m ³ /h l/min	HYDRAULIC DATA							WEIGHT Kg	
						VOLTAGE 50/60 Hz	P1 MAX W	In A		0	2,4	3	4,2	5,4	7,2	9,6		
										0	40	50	70	90	120	160		
DN 32	EVOPLUS B 40/220.32 SAN M	60151148	867	220	DN 32 PN 6	220/240 V	85	0,55	H (m)	4,2	4,2	4,2	3,3	2,5	1,3			8,6
	EVOPLUS B 60/220.32 SAN M	60151151	929	220	DN 32 PN 6	220/240 V	110	0,75		6,1	6,1	5,6	4,6	3,6	2,2			8,6
	EVOPLUS B 80/220.32 SAN M	60151152	1.004	220	DN 32 PN 6	220/240 V	150	0,97		8	8	7,3	6	4,9	3,3			8,6
	EVOPLUS B 110/220.32 SAN M	60151153	1.081	220	DN 32 PN 6	220/240 V	200	1,3		11,2	10,5	9,6	8,1	6,8	5	2,6		8,6
DN 40	EVOPLUS B 40/250.40 SAN M	60151154	926	250	DN 40 PN 10	220/240 V	75	0,55	H (m)	4,2	4,2	4,2	3,3	2,5	1,3			9,3
	EVOPLUS B 60/250.40 SAN M	60151155	989	250	DN 40 PN 10	220/240 V	105	0,75		6,1	6,1	5,6	4,6	3,6	2,2			9,3
	EVOPLUS B 80/250.40 SAN M	60151157	1.064	250	DN 40 PN 10	220/240 V	140	0,97		8	8	7,3	6	4,9	3,3			9,3
	EVOPLUS B 110/250.40 SAN M	60151158	1.141	250	DN 40 PN 10	220/240 V	190	1,3		11,2	10,5	9,6	8,1	6,8	5	2,6		9,3

Fiyatlara KDV dahil değildir.

K-HA

CENTRIFUGAL PRESSURE BOOSTING PUMPS



K-HA single impeller centrifugal pump is designed for water pressure boosting in households, flats (domestic properties) to provide additional pressure to hot and cold water taps and similar outlet points. K-HA centrifugal pump is mainly for use in open vented systems (tanks), but may also be installed directly on the incoming water mains supply to feed a boiler, provided approval has been obtained from the local Water Company. The pump is supplied with a 0,3 meter power cable.

Operating range

up to 4,2 m³/h with head up to 22m.

Liquid quality requirements clean, free from solids or abrasive substances, non viscous, non aggressive, non crystallized, chemically neutral, close to the characteristics of water.

Liquid temperature range from 0°C to +100 °C

Ambient temperature from -10°C to +55 °C

Environment humidity ≤ 95%

Maximum operating pressure

4 bar (35° C liquid temperature)

2 bar (65° C liquid temperature)

Minimum automatic (flow switch) operating pressure

0,5 mwc

Minimum automatic (flow switch) operating flow

2,5 l/min

K-HA

MODEL	CODE	PRICE €	VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	Ist A	cos	CONDENSATEUR (F)	HOSE DIAMETER (mm)	MAXIMUM FLOW RATE (m ³ /h)	MAXIMUM HEAD (m)	WEIGHT (kg)
					KW	HP								
K 20/9 HA	60161484	166	220V	0,18	0,03	0,12	0,82	2,89	0,926	8	ø 16 mm	2,10	9	5,4
K 30/12 HA	60161483	206	220V	0,28	0,12	0,16	1,28	4,09	0,969	8	ø 16 mm	2,40	12	7,9
K 30/15 HA	60161482	223	220V	0,34	0,18	0,25	1,5	4,09	0,98	8	ø 16 mm	3,00	15	7,9
K 40/19 HA	60161481	240	220V	0,47	0,25	0,34	2,25	7,6	0,905	8	ø 16 mm	3,60	18	8,9
K 40/22 HA	60160878	300	220V	0,57	0,37	0,5	2,54	7,6	0,932	8	ø 16 mm	4,20	22	8,9

Fiyatlara KDV dahil değildir.

Eviniz Gree Isı Pompası ile her zaman sıcak!



VERSATI HEAT PUMP ISI POMPASI

SIBA

ACTIVE DRIVER PLUS

INVERTER



ACTIVEDRIVER PLUS

Active Driver Plus are inverters used for the control of hydraulic pumps. Their obvious fields of application are domestic, industrial, and agricultural constant pressure pumping systems.

The OLED display offers an extremely simple and intuitive graphic interface. Displaying or changing any parameters is extremely simple, which in turn also simplifies maintenance.

Installation is also very easy: the installation wizard asks the user for the parameters required for the configuration.

Active Driver Plus inverters provide a reduction of electric consumption, thanks to the inverter technology, whilst at the same time ensuring maximum comfort thanks to the constant pressure.

They are extremely versatile, as they do not require external sensors and non-return valves. There is in-fact a built-in pressure sensor, a flow switch, and a non-return valve.

The advantages of Active Driver Plus are:

- comfort, thanks to the constant pressure,
- energy savings, thanks to the inverter technology.
- less noise,
- compact shape,
- all the built-in protections: dry run, overload, abnormal voltage, overtemperature, freezing.

Line voltage 115V and 230V single-phase. 400V three-phase

Electric pump voltage 115V and 230V single-phase, 230V and 400V three-phase

Power supply frequency 50 Hz - 60 Hz.

Installation

vertical and horizontal (M/M and M/T only)

Maximum liquid temperature 50°C.

Max operating temperature 50°C.

Max flow rate 18m³/h.

Maximum working pressure 13 bar.

Pressure regulation range from 1 to 13 bar.

Suction diameter (DNA) 1 1/4" male.

Delivery diameter (DNM) 1 1/2" female.

Protection level IP55.

Communication interface for sets

YES, an Active Driver Plus for each pump

Non-return valve not required

Equipped with graphic display



ONLINE TRAINING



PAG. 9

MODEL	CODE	PRICE €	MAX CURRENT OF MOTOR A	MAX MOTOR POWER kW	VOLTAGE 50 Hz	PUMP SUPPLY VOLTAGE Volt	CONNECTIVITY FOR PARALLEL WORKING	TO BE USED WITH PUMPS TYPE	PRESSURE REGULATION RANGE BAR	WEIGHT Kg	Q.TY X PALLET
ACTIVE DRIVER PLUS M/M 1,1	60149661	634	8,5	1,1	Single-phase 1x230	Single-phase 1x230	YES	Surface pumps, 4" submersible pumps and 5" pumps with single-phase motor and input current of up to 8,5 A	1-9	3,5	32
ACTIVE DRIVER PLUS M/M 1,5/ DUAL VOLTAGE	60170688	942	11	0,55	Single-phase 1x115	Single-phase 1x115	YES	Surface pumps, 4" submersible pumps and 5" pumps with single-phase motor and input current of up to 11 A	1-9	3,5	32
					1,5	1x230					
ACTIVE DRIVER PLUS M/M 1,8/ DUAL VOLTAGE	60170689	1.077	14	1,0	Single-phase 1x115	Single-phase 1x115	YES	Surface pumps, 4" submersible pumps and 5" pumps with single-phase motor and input current of up to 14 A	1-9	3,8	32
					1,8	1x230					
ACTIVE DRIVER PLUS M/T 1	60169777	934	4,7	1,0	Single-phase 1x230	Three-phase 3x230	YES	Surface pumps, 4" submersible pumps and 5" pumps with three-phase 230V motor and input current of up to 4,7 A	1-9	3,5	32
ACTIVE DRIVER PLUS M/T 2,2	60170687	1.188	10,5	2,2	Single-phase 1x230	Three-phase 3x230	YES	Surface pumps, 4" submersible pumps and 5" pumps with three-phase 230V motor and input current of up to 10,5 A	1-13	3,5	32
ACTIVE DRIVER PLUS T/T 3	60169808	1.616	7,5	3,0	Three-phase 3x400	Three-phase 3x400	YES	Surface pumps, 4" submersible pumps and 5" pumps with three-phase 400V motor and input current of up to 7,5 A	1-13	4,5	32
ACTIVE DRIVER PLUS T/T 5,5	60170715	2.018	13,3	5,5	Three-phase 3x400	Three-phase 3x400	YES	Surface pumps, 4" submersible pumps and 5" pumps with three-phase 400V motor and input current of up to 13,3 A	1-13	4,6	32

Fiyatlara KDV dahil değildir.

SMART PRESS

ON/OFF CONTROLLER



SMART PRESS is an ON/OFF electronic device designed to switch the pump ON/OFF without using an expansion vessel. The device protects the pump against dry running without using level probes or float switch.

It has an adjustable cut-in pressure and even with a high flow the pressure losses are small. All the SMART PRESS models have a MANUAL AND AUTOMATIC RESTART.

SMART PRESS

MODEL	CODE	PRICE €	SETTING PRESSURE bar	DNA GAS	DNM GAS	WEIGHT Kg	Q.TY x PALLET
SMART PRESS WG 1,5 - AUTOM. RESET - WITHOUT CABLE	60114808	125	1,5	1" M	1" ¼ F	1,3	100
SMART PRESS WG 1,5 - AUTOM. RESET - WITH CABLE	60113308	132	1,5	1" M	1" ¼ F	1,6	100
SMART PRESS WG 3.0 - AUTOM. RESET - WITHOUT CABLE	60114809	184	1,5	1" M	1" ¼ F	1,3	100
SMART PRESS WG 3.0 - AUTOM. RESET. - WITH CABLE	60113922	193	1,5	1" M	1" ¼ F	1,6	100

Fiyatlara KDV dahil değildir.

JET - JETINOX - JETCOM

SELF-PRIMING CENTRIFUGAL PUMPS



JET



JETINOX



JETCOM

Self-priming centrifugal pump with excellent suction capacity even when there are air bubbles. Particularly suitable for water supply in domestic installations, small-scale agriculture, gardening and wherever self-priming operation is necessary.

Jet: cast iron pump body.

Jetinox: stainless steel pump body.

Jetcom: technopolymer pump body.

Motor support in cast iron, technopolymer impeller, diffuser, Venturi tube and sand guard. Stainless steel adjustment rings.

Carbon/ceramic mechanical seal. Asynchronous motor closed and cooled by external ventilation. Built-in thermal and current overload protection and a capacitor permanently on in the single-phase version. For the protection of the three-phase motor it is advisable to use a suitable overload protection complying with the regulations in force.

Operating range two-poles from 0.4 to 10.5 m³/h with head up to 62 metres

Liquid temperature range

from 0°C to +35°C for domestic use
from 0°C to +40°C for other use

Pumped liquid characteristics clean, free from solids or abrasive substances, not viscous, not aggressive, not crystallised and chemically neutral.

Maximum ambient temperature +40°C

Maximum working pressure

6 bar (600 kPa) for Jet and Jetcom
8 bar (800 kPa) for Jetinox

Protection level

IP 44 (IP 55 terminal board protection).

Insulation class F

IE3 ≥ 0,75 kW

ACCESSORIES
PAG. 119

JET

MODEL	CODE	PRICE €	ELECTRICAL DATA						HYDRAULIC DATA														
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	MOTOR TYPE	Q=m ³ /h									DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET		
					kW	HP				0	0,6	1,2	1,8	2,4	3,0	3,6	4,2					4,8	
JET 62 M	102660000	210	1X220-240 V~	0,72	0,44	0,6	3,12	-	Q=l/min	0	10	20	30	40	50	60	70	80	1"	1"	10,5	28	
JET 82 M	102660020	207	1X220-240 V~	0,85	0,6	0,8	3,8	-	H (m)	42	35	29,2	25,6	22,9	21,1				1"	1"	10,7	28	
JET 82 T	102660030	207	3X230-400 V~	0,86	0,6	0,8	2,8-1,6	-		47	40	34	30	26,2	23,5	20,3				1"	1"	10,7	28
JET 102 M	102660040	243	1X220-240 V~	1,13	0,75	1	5,1	-		53,8	47	41	36,3	32,4	28,8	25,8				1"	1"	12,5	28
JET 102 T	60179394	271	3X230-400 V~	1,03	0,75	1	3,4-2	IE3		53,8	47	41	36,3	32,4	28,8	25,8				1"	1"	12,5	28
JET 112 M	102660060	269	1X220-240 V~	1,4	1	1,36	6,2	-		61	54	47,8	42,8	38,8	34,8	20				1"	1"	13,5	28
JET 112 T	60179414	289	3X230-400 V~	1,35	1	1,36	4,1-2,4	IE3		61	54	47,8	42,8	38,8	34,8	20				1"	1"	13,5	28
JET 92 M	102660080	239	1X220-240 V~	0,94	0,75	1	4,2	-		36,2	33,5	31	28,4	26	24	21,8	19,6	17	1"	1"	11,7	28	
JET 132 M	102660100	262	1X220-240 V~	1,49	1	1,36	6,6	-		48,3	45,6	42,8	40	37,6	35	32,5	30	27,2	1"	1"	13,5	28	
JET 132 T	60179413	283	3X230-400 V~	1,37	1	1,36	4,3-2,5	IE3		48,3	45,6	42,8	40	37,6	35	32,5	30	27,2	1"	1"	13,5	28	

JETINOX

MODEL	CODE	PRICE €	ELECTRICAL DATA						HYDRAULIC DATA														
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	MOTOR TYPE	Q=m ³ /h									DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET		
					kW	HP				0	0,6	1,2	1,8	2,4	3,0	3,6	4,2					4,8	
JETINOX 82 M	102640020	251	1X220-240 V~	0,85	0,6	0,8	3,8	-	Q=l/min	0	10	20	30	40	50	60	70	80	1"	1"	7,8	28	
JETINOX 82 T	102640030	246	3X230-400 V~	0,86	0,6	0,8	2,8-1,6	-	H (m)	47	40	34	30	26,2	23,5	20,3				1"	1"	7,8	28
JETINOX 102 M	102640040	289	1X220-240 V~	1,13	0,75	1	5,1	-		53,8	47	41	36,3	32,4	28,8	25,8				1"	1"	9,6	28
JETINOX 102 T	60179395	312	3X230-400 V~	1,04	0,75	1	3,3-1,9	IE3		53,8	47	41	36,3	32,4	28,8	25,8				1"	1"	9,6	28
JETINOX 112 M	102640060	303	1X220-240 V~	1,4	1	1,36	6,2	-		61	54	47,8	42,8	38,8	34,8	20				1"	1"	10,6	28
JETINOX 112 T	60179416	325	3X230-400 V~	1,35	1	1,36	4,3-2,5	IE3		61	54	47,8	42,8	38,8	34,8	20				1"	1"	10,6	28
JETINOX 92 M	102640080	275	1X220-240 V~	0,94	0,75	1	4,2	-		36,2	33,5	31	28,4	26	24	21,8	19,6	17,5	1"	1"	8,8	28	
JETINOX 132 M	102640100	303	1X220-240 V~	1,49	1	1,36	6,6	-		48,3	45,6	42,8	40	37,6	35	32,5	30	27,2	1"	1"	10,6	28	
JETINOX 132 T	60179415	325	3X230-400 V~	1,43	1	1,36	4,7-2,7	IE3		48,3	45,6	42,8	40	37,6	35	32,5	30	27,2	1"	1"	10,6	28	

Fiyatlara KDV dahil değildir.

MULTISTAGE CENTRIFUGAL AND SELF-PRIMING PUMPS

PERFORMANCE RANGE

DP - DOMESTIC WATER SUPPLY

HYDRAULIC DATA (n ≈ 2800 1/min.)																	
MODEL	P2 NOMINAL		EJECTOR TYPE	SUCTION DEPTH	Delivery pressure in bar												
	kW	HP			1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	6,5	7	
					Capacity table in l/h												
DP 82 M - T	0,6	0,8	E 25	9	1813	1080	446	33	-	-	-	-	-	-	-	-	
				12	1426	225	-	-	-	-	-	-	-	-	-	-	
				15	900	326	-	-	-	-	-	-	-	-	-	-	
			E 30	9	1753	1286	812	524	261	12	-	-	-	-	-	-	-
				12	1345	965	608	329	162	0	-	-	-	-	-	-	-
				15	1166	761	452	228	45	-	-	-	-	-	-	-	-
DP 102 M - T	0,75	1	E 25	9	2386	1756	1097	515	126	-	-	-	-	-	-		
				12	1930	1190	536	87	-	-	-	-	-	-	-		
				15	1459	773	252	-	-	-	-	-	-	-	-		
			E 30	12	-	1240	872	566	329	156	-	-	-	-	-	-	
				15	-	1028	701	449	255	96	-	-	-	-	-	-	
				18	-	785	527	302	150	15	-	-	-	-	-	-	
21	-	635	374	180	39	-	-	-	-	-	-	-	-				
DP 151 M - T	1,1	1,5	E 20	9	-	-	-	3470	2890	2220	1500	750	-	-	-		
				12	-	-	-	3110	2510	1850	1100	300	-	-	-		
				15	-	-	-	2710	2100	1380	640	-	-	-	-		
			18	-	-	-	2360	1700	950	-	-	-	-	-	-		
			E 25	15	-	-	-	2800	2330	1830	1350	900	520	-	-	-	
				18	-	-	-	2530	2050	1550	1090	680	300	-	-	-	
				21	-	-	-	2280	1800	1300	860	470	-	-	-	-	
			E 30	21	-	-	-	1820	1650	1410	1160	910	700	520	-	-	
				24	-	-	-	1680	1520	1260	1020	780	580	420	-	-	
27	-	-		-	1550	1360	1110	880	680	490	330	-	-				
DP 251 M - T	1,85	2,5	E 20	9	-	-	-	4300	3600	2900	2180	1400	640	-	-		
				12	-	-	-	3750	3140	2540	1700	940	-	-	-		
				15	-	-	-	-	2780	2040	1300	500	-	-	-		
			18	-	-	-	-	2340	1610	820	-	-	-	-			
			E 25	15	-	-	-	-	2920	2400	1900	1400	950	570	-	-	
				18	-	-	-	-	2600	2110	1620	1150	720	360	-	-	
				21	-	-	-	-	2350	1850	1350	900	510	-	-		
			24	-	-	-	-	2050	1550	1080	660	300	-	-			
			E 30	21	-	-	-	-	-	1710	1480	1220	980	770	590	420	
24	-	-		-	-	-	1580	1330	1080	850	670	490	330				
27	-	-		-	-	-	1440	1200	950	750	560	400	250				

M - T = Single-phase (M) and Three-phase (T)

EURO - EUROINOX - EUROCOM

MULTISTAGE CENTRIFUGAL PUMPS



EURO



EUROINOX



EUROCOM

Multistage horizontal centrifugal pump, featuring extremely silent running suitable for domestic use for water supply and pressurisation, irrigation of gardens and vegetable gardens, and moving water in general.

Euro: pump body in 200 UNI ISO 185 cast iron.

Euroinox: stainless steel pump body.

Eurocom: technopolymer pump body.

Motor support in die-cast aluminium, seal holder in AISI 304 steel. Mechanical seal in carbon/ceramic. Rotor shaft in AISI 304 steel. Rotors, diffuser bodies and diffusers in technopolymer. Adjustment rings in stainless steel.

Protection level of motor IP 44

Protection level of terminal board IP 55

Insulation class F

Operating range from 10 to 120 l/min. with a head of up to 72 m.

Pumped liquid characteristics clean, free from solid or abrasive substances, not viscous, not aggressive, not crystallised, chemically neutral and close to the characteristics of water.

Liquid temperature range

from 0°C to +35°C C for domestic use

(EN 60335-2-41)

from 0°C to +40°C for other uses.

Maximum ambient temperature +40°C

Maximum operating pressure 8 bar (800 kPa)

Euroinox self-priming, other uses.

Maximum ambient temperature +40°C

Maximum operating pressure 8 bar (800 kPa)

Euroinox self-priming.

IE3 ≥ 0,75 kW

ACCESSORIES
PAG. 119

EURO

MODEL	CODE	PRICE €	ELECTRICAL DATA						HYDRAULIC DATA																						
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	MOTOR TYPE	Q=																						
					kW	HP			Q=m³/h	0	0,6	1,2	1,8	2,4	3,0	3,6	4,2	4,8	6	7,2	N° IMPELLERS	DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET						
EURO 25/30 M	102970000	297	1x220-240 V ~	0,52	0,37	0,5	2,4	-	34,4	31,7	28,3	23,5	17,5	11																	3
EURO 30/30 M	60169377	323	1x220-240 V ~	0,83	0,45	0,6	3,9	-	46	42,2	37,8	31,2	23,3	14,3													4	1"	1"	12,7	28
EURO 40/30 M	102970040	368	1x220-240 V ~	0,88	0,55	0,75	3,9	-	57	52,7	47	38,8	29	17,7													5	1"	1"	12,8	28
EURO 30/50 M	102970060	346	1x220-240 V ~	0,880	0,55	0,75	3,9	-	42,5	40,2	38,2	36,2	33,8	30	24,8	19,5	14										3	1"	1"	11,7	28
EURO 40/50 M	102970080	409	1x220-240 V ~	1,200	0,75	1	5,3	-	57,5	55,3	52,8	50,1	47,1	42,7	35,8	28	19										4	1"	1"	15,6	28
EURO 40/50 T	60179428	438	3x230-400 V ~	1,07	0,75	1	3,6-2,1	IE3	57,5	55,3	52,8	50,1	47,1	42,7	35,8	28	19										4	1"	1"	15,6	28
EURO 50/50 M	102970100	429	1x220-240 V ~	1,480	1	1,36	6,3	-	72	68,5	65,5	62,1	58,2	52,2	43,6	34,5	26										5	1"	1"	16,2	28
EURO 50/50 T	60179426	464	3x230-400 V ~	1,3	1	1,36	4,1-2,4	IE3	72	68,5	65,5	62,1	58,2	52,2	43,6	34,5	26										5	1"	1"	16,2	28
EURO 30/80 M	102970140	455	1x220-240 V ~	1,2	0,8	1,1	5,2	-	47		46,5	45	43,5	41	38	34,5	31	23	12								4	1"	1"	15,6	28
EURO 30/80 T	60179424	491	3x230-400 V ~	1,06	0,8	1,1	3,6-2,1	IE3	47		46,5	45	43,5	41	38	34,5	31	23	12								4	1"	1"	15,6	28
EURO 40/80 M	102970160	475	1x220-240 V ~	1,48	1	1,36	6,3	-	59		57	56	54	51	47	43,5	39	29,5	16,5								5	1"	1"	16,2	28
EURO 40/80 T	60179422	514	3x230-400 V ~	1,3	1	1,36	4,1-2,4	IE3	59		57	56	54	51	47	43,5	39	29,5	16,5								5	1"	1"	16,2	28

Fiyatlara KDV dahil değildir.

EURO - EUROINOX - EUROCOM

MULTISTAGE CENTRIFUGAL PUMPS



IE3 ≥ 0,75 kW

EUROINOX

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA													N° IMPELLERS	DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET	
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	MOTOR TYPE	Q=m³h	0	0,6	1,2	1,8	2,4	3,0	3,6	4,2	4,8	6	7,2						
					Q=l/min	0			10	20	30	40	50	60	70	80	100	120								
EUROINOX 25/30 M	102970200	343	1x220-240 V ~	0,520	0,37	0,5	2,4	-	H (m)	34	31,7	28,3	23,5	17,5	11						3	1"	1"	9,7	28	
EUROINOX 30/30 M	102970220	371	1x220-240 V ~	0,720	0,45	0,6	3,2	-		46	42,2	37,8	31,2	23,3	14,3							4	1"	1"	11,7	28
EUROINOX 40/30 M	102970240	415	1x220-240 V ~	0,880	0,55	0,75	3,9	-		57	52,7	47	38,8	29	17,7							5	1"	1"	11,9	28
EUROINOX 30/50 M	102970260	393	1x220-240 V ~	0,880	0,55	0,75	3,9	-		42	40,2	38,2	36,2	33,8	30	24,8	19,5	14				3	1"	1"	10,5	28
EUROINOX 30/50 T	102970270	387	3x230-400 V ~	0,870	0,55	0,75	2,8-1,6	-		42	40,2	38,2	36,2	33,8	30	24,8	19,5	14				3	1"	1"	10,5	28
EUROINOX 40/50 M	102970280	454	1x220-240 V ~	1,200	0,75	1	5,3	-		58	55,3	52,8	50,1	47,1	42,7	35,8	28	19				4	1"	1"	14,6	28
EUROINOX 40/50 T	60179419	490	3x230-400 V ~	1,07	0,75	1	3,6-2,1	IE3		58	55,3	52,8	50,1	47,1	42,7	35,8	28	19				4	1"	1"	14,6	28
EUROINOX 50/50 M	102970300	477	1x220-240 V ~	1,480	1	1,36	6,3	-		72	68,5	65,5	62,1	58,2	52,2	43,6	34,5	26				5	1"	1"	15,1	28
EUROINOX 50/50 T	60179421	515	3x230-400 V ~	1,3	1	1,36	4,1-2,4	IE3		72	68,5	65,5	62,1	58,2	52,2	43,6	34,5	26				5	1"	1"	15,1	28
EUROINOX 30/80 M	102970340	499	1x220-240 V ~	1,200	0,8	1,1	5,2	-		47	46,5	45	43,5	41	38	34,5	31	23	12			4	1"	1"	14,6	28
EUROINOX 30/80 T	60179423	544	3x230-400 V ~	1,06	0,8	1,1	3,6-2,06	IE3		47	46,5	45	43,5	41	38	34,5	31	23	12			4	1"	1"	14,6	28
EUROINOX 40/80 M	102970360	524	1x220-240 V ~	1,48	1	1,36	6,3	-		59	57	56	54	51	47	43,5	39	29,5	16,5			5	1"	1"	15,1	28
EUROINOX 40/80 T	60179418	565	3x230-400 V ~	1,3	1	1,36	4,1-2,4	IE3		59	57	56	54	51	47	43,5	39	29,5	16,5			5	1"	1"	15,1	28

EUROCOM

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA													N° IMPELLERS	DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET	
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	MOTOR TYPE	Q=m³h	0	0,6	1,2	1,8	2,4	3,0	3,6	4,2	4,8	6	7,2						
					Q=l/min	0			10	20	30	40	50	60	70	80	100	120								
EUROCOM 25/30 M	102960000	286	1x220-240 V ~	0,520	0,37	0,5	2,4	-	H (m)	34,4	31,7	28,3	23,5	17,5	11						3	1"	1"	8	28	
EUROCOM 30/50 M	102960060	337	1x220-240 V ~	0,880	0,55	0,75	3,9	-		42,2	40,2	38,2	36,2	33,8	30	24,8	19,5	14				3	1"	1"	8,8	28
EUROCOM 40/50 M	102960080	396	1x220-240 V ~	1,200	0,75	1	5,3	-		57,7	55,3	52,8	50,1	47,1	42,7	35,8	28	19,2				4	1"	1"	11	28
EUROCOM 40/50 T	60179427	428	3x230-400 V ~	1,180	0,75	1	3,8-2,2	IE3		57,7	55,3	52,8	50,1	47,1	42,7	35,8	28	19,2				4	1"	1"	11	28
EUROCOM 30/80 T	60179425	482	3x230-400 V ~	1,040	0,8	1,1	3,3-1,9			47	46,5	45	43,5	41	38	34,5	31	23	12				4	1"	1"	11

Fiyatlara KDV dahil değildir.

SIBA
SOLAR

**ELEKTRİK FATURALARINDAN
KURTULUN!**

*Bakım ve Servis İstemez
Fatura Öder gibi Ödeme İmkânı*

SIBA

ESYBOX MINI³

ELECTRONIC PRESSURISATION SYSTEM



ESYBOX MINI³ is the DAB compact automatic pressurisation system for the water supply of a single dwelling. ESYBOX MINI³ guarantees the comfort of constant pressure (Pressure Set Point adjustable from 1 up to 5,5 bar) inside the system, and energy savings thanks to the inverter technology. Suitable for use with drinking water, in domestic systems, and in gardening applications. ESYBOX MINI³ does not require any additional components for its installation.

It consists of a high frequency self-priming double impeller pump, management inverter electronics, pressure and flow sensors, adjustable high resolution LCD display with 1 litre built-in expansion vessel, and cartridge check valve.

The double suction and delivery ports allow both vertical and horizontal installation. Thanks to its compact sizes, installation is also possible in difficult places without high air exchange.

Operating range

capacity up to 80 l/min; head up to 55 m

Liquid quality requirements clean, free from solid or abrasive contaminants, non-viscous, non-aggressive, uncrystallised and chemically neutral.

Liquid temperature range from 0°C to +35°C for domestic use

for other use from 0°C to +40°C

Maximum suction depth 8 meters

Maximum ambient temperature +50°C

Maximum operating pressure

7,5 bar (750 kPa)

Motor protection rating IPX4

Insulation class F

Installation Horizontal or vertical fixed position

Special executions on request

alternative types of electrical plug

esybox mini³



ONLINE TRAINING

D+CONNECT

PAG. 9

MODEL	CODE	PRICE €	N° IMPELLERS	ELECTRICAL DATA				HYDRAULIC DATA								DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET	
				VOLTAGE 50 - 60 Hz	P1 MAX		In A	Q=m³h	0,6	1,2	1,8	2,4	3,0	3,6	4,2					4,8
					kW	HP														
ESYBOX MINI 3	60179457	853	2	1x220-240V ~	0,85	1,1	4,8	H	55,0	55,0	49,0	39,0	31,0	23,0	14,0	4,0	1"	1"	14,6	18
ESYBOX MINI 3 - KIWA	60183505	980	2	1x220-240V ~	0,85	1,1	4,8	(m)	55,0	55,0	49,0	39,0	31,0	23,0	14,0	4,0	1"	1"	14,6	18

The KIWA version is provided with additional pressure sensor in the suction side that blocks the pump if the inlet pressure is below the set limit, compliant with the KIWA standards.

APPLICATIONS



Esybox mini³

Apartments up to 3 floors, 2 bathrooms and 50m² of garden.*

*Indicative data. Please refer to the technical catalogue or DNA for correct sizing.


CERTIFICATIONS



SUITABLE FOR PUMPING WATER FROM:



WELLS DOWN TO 8 M DEEP




RAINWATER COLLECTION TANKS



TANKS



AQUEDUCT where permitted by law

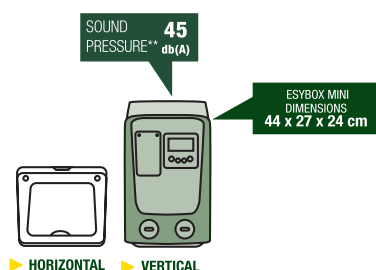

discover **esybox LINE**
<https://esyboxline.com>



*Compared to a traditional booster set in terms of medium usage conditions.

** Sound pressure measured at 1 meter distance in free field



Fiyatları KDV dahil değildir.

ESYBOX

ELECTRONIC PRESSURIZATION SYSTEM



2013



ESYBOX is DAB's new integrated system for pressurization in domestic and residential areas.

ESYBOX does not require any additional components for installation. It consists of a self-priming multistage pump, electronic inverter management, flow and pressure sensors, high-resolution swivel LCD display and an integrated 2 liter expansion tank. It can be installed both vertically and horizontally and even in tight spaces without a high air exchange.

The water-cooled engine, the hull protection in ABS with sound-absorbing function, the vibration damping feet and electronics make it an absolutely quiet (**43 dB**) and compact.

The wireless device facilitates the creation of pressurization units and connectivity with other DAB devices.

Degree of protection IP X 4

Insulation class F

Pumped liquid clean, free from solids or abrasive, non-aggressive, non-viscous, crystallized and not chemically neutral.

Maximum liquid temperature 40° C

Maximum ambient temperature 50° C

Maximum suction depth

self priming up to 8 metres.

Maximum working pressure 8 bar (800 kPa).

esybox



ONLINE TRAINING

D CONNECT

PAG. 9

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA												DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET		
			VOLTAGE 50 - 60 Hz	P1 MAX		I MAX A	Q=m³/h	0	0,6	1,2	1,8	2,4	3,0	3,6	4,2	4,8	5,4	6					6,6	7,2
				kW	HP		Q=l/min	0	10	20	30	40	50	60	70	80	90	100					110	120
ESYBOX	60147200	1.331	1x220-240 V ~	1,55	2,1	10	H	65	63,5	61,5	59,5	57	53	48	41,5	35	27,5	19	10	2	1"	1"	27	6
ESYBOX - KIWA	60184312	1.465	1x220-240 V ~	1,55	2,1	10	(m)	65	63,5	61,5	59,5	57	53	48	41,5	35	27,5	19	10	2	1"	1"	27	6

The KIWA version is provided with additional pressure sensor in the suction side that blocks the pump if the inlet pressure is below the set limit, compliant with the KIWA standards.

APPLICATIONS



Esybox

Houses and small residential buildings up to 6 floors and a maximum of 9 apartments.*



Esytwin

Small and large residential buildings up to 9 floors and a maximum of 17 apartments.*

CERTIFICATIONS



SUITABLE FOR PUMPING WATER FROM:



WELLS DOWN TO 8 M DEEP



RAINWATER COLLECTION TANKS



TANKS



AQUEDUCT where permitted by law

*Indicative data. Please refer to the technical catalogue or DNA for correct sizing.

KIT 2 ESYBOX

SINGLE ESYBOX DIMENSIONS
57 x 27 x 35 cm

SOUND PRESSURE** 43 db(A)




KIT DIMENSIONS
73 x 75 x 35 cm

MODEL	CODE	PRICE €
KIT 2 ESYBOX + ESYTWIN ***	60170272	3.099

*Compared to a traditional booster set in terms of medium usage conditions.

** Sound pressure measured at 1 meter distance in free field

*** Unmounted provided







discover **esybox LINE**
<https://esyboxline.com>



ESYBOX LINE - ACCESSORIES

ELECTRONIC PRESSURIZATION SYSTEM

	MODEL	CODE	PRICE €
 <p>ALSO SUITABLE FOR ESYBOX MINI³</p>	<p>KIT PIPE UNION 3PCS MF 1" WITH O-RING</p> <p>Kit consisting of 2 x 3-piece unions, to facilitate the connection of Esybox and Esybox mini³ to the system</p>	SP00000630	33
 <p>ALSO SUITABLE FOR ESYBOX MINI³</p>	<p>ESYWALL</p> <p>Kit complete with brackets, screws, dowels and two accessories for absorption of vibrations.</p>	60161442	77

KIT OUTDOOR	MODEL	CODE	PRICE €
 <p>FOR ESYBOX</p>	<p>ESYCOVER + ESYGRID</p> <p>KIT OUTDOOR ESYBOX</p> <p>Consisting of Esycover + Esygrid, which allows the installation of ESYBOX outside, protecting it from rain and the entry of foreign bodies.</p> <p>Vertical installation only.</p>	60185697	81
 <p>FOR ESYBOX MINI³</p>	<p>ESYCOVER + ESYGRID</p> <p>KIT OUTDOOR ESYBOX MINI³</p> <p>Consisting of Esycover + Esygrid, which allows the installation of ESYBOX MINI³ outside, protecting it from rain and the entry of foreign bodies.</p> <p>Vertical installation only.</p>	60185698	81



Fiyatlara KDV dahil değildir.

ESYCOVER

OUTSIDE INSTALLATION

Suitable for both Esybox and Esybox mini³.








ESYGRID

INSECT GRILLS

Suitable for vertical or horizontal installation.
Suitable for both Esybox and Esybox mini³.

ESYBOX LINE - ACCESSORIES

ELECTRONIC PRESSURIZATION SYSTEM

	MODEL	CODE	PRICE €
  <p>18 x 29 x 32 cm</p>	<h2>ESYDOCK</h2> <p>Thanks to the 4 plumbing configuration possibilities offers an 'installation even more rapid, easy and flexible. It is complete with all the interfaces required for connecting to the system. It incorporates anti vibration feet to ensure the same quietness as Esybox.</p>	60147247	240
  <p>23 x 75 x 35 cm</p>	<h2>ESYTWIN</h2> <p>Esytwin is the evolution of Esydock, of which maintains all the benefits, for the creation of two groups of pumps. Esytwin offers exceptional performance thanks to possibility of combined operation with a reduced size of 50% compared to any other equivalent traditional system.</p>	60160491	457
	<h3>ESYTWIN DOUBLE CONNECTION KIT</h3> <p>2" T suction and delivery manifold connection kit for the connection of 2 Esytwin and the creation of boosters with up to 4 Esybox. Suction and delivery manifold, each one consisting of: no. 2 x 1"1/4 Nipples no. 2 x 1"1/4 female -and 2" male reductions no. 3 x 2" 3-piece connectors no. 1 x 2" female T connector</p>	60184281	424

Fiyatlara KDV dahil değildir.



**DELIVERY AND SUCTION
FITTING 1" 1/4**



68 x 29 x 35 cm



**KIT DIMENSIONS
73 x 75 x 35 cm**

Sert su sizin için de sorunsa, gelin konuşalım!



softena



Softena ile suyunuz yumuşacık olsun!

SIBA

NBB

MOUNTING KIT FOR WATER COLLECTION AND PRESSURIZATION



NBB is the solution for a domestic pressurizing system.

The basic concept is the modularity of its components such as: the NBB TANK KIT, the submerged or the surface pump, the inverter (in case the pump is without integrated electronics) and an assembling kit including the expansion tank (where this is not integrated in the pump itself). In all its different configuration the NBB is characterized by its compact dimension, great comfort and, in the version with inverter, also by an important aspect in terms of energy saving.

NBB TANK KIT consists of:

- 280 Lt. tank suitable for potable water compliant with the european norms EN1717 e EN13077
- Equipped with Filling valve and overflow valve
- Protection grid

Choosing the ADDITIONAL TANK KIT, consisting of a 280 liter tank, the junction elbow plus gasket and a belt, it's possible to double the capacity of the system. In addition to the NBB it is necessary to chose the assembling kit corresponding to the type of pump (or pump with inverter) to be utilized. The pump to be installed, as well as the inverter, are not included in the kit and must be order separately. The installation kit comprehends all the accessories necessary for the installation of the pump (or the inverter) to the NBB TANK KIT. For the PULSAR and EUROINOX installation kits also a 4 liter expansion tank is included.

Operating range

From 10 to 120 litres/min. with head up to 72 m.

Liquid temperature range

for domestic use: from 0°C to +35°C

Liquid quality requirements

Suitable for potable water pursuant to EN1717 and EN13077 European standards.

Maximum ambient temperature +40°C

Max. operational pressure

8 bar (800 kPa) for surface pump configurations.

Max. inlet pressure 6 bar

Protection rating

IP44 for surface pumps.

IP68 for submerged pumps.

Insulation class F



PAG. 9

AD PLUS
PAG. 29

ACCESSORIES
PAG. 119

MODEL	CODE	PRICE €
KIT NBB WRAS TANK 280 LITRE (INCL. GRID)	60149355	731
KIT ACTIVE FOR NBB	60116646	73
KIT EUROINOX FOR NBB	60123882	191
KIT PULSAR FOR NBB	60116638	415
KIT DIVERTRON FOR NBB	60123662	151
KIT ADDITIONAL TANK	60123556	473

Fiyatlara KDV dahil değildir.

Installation kit are designed for exclusive use with pump models specified below.

TABLE OF SELECTION KIT NBB: A + B + C = NBB

A	B		C	
NBB TANK	PUMP MODEL	ACTIVE DRIVER PLUS	INSTALLATION KIT *	
 60149355 - TANK KIT NBB 280 Litre (including protection grid) EXPANDABLE WITH:  60123556 AUXILIARY TANK KIT	 EUROINOX M	60149661 AD PLUS M/M 1.1	60123882 - EUROINOX INSTALLATION KIT - Suction pipe - Fittings - Screws - Bracket for AD - Expansion tank 5 lt - Ball valve	
		60169777 AD PLUS M/T 1.0		
	 ACTIVE EI M	60116646 - ACTIVE INSTALLATION KIT - Suction pipe - Fittings - Screws		
			104160070 - PULSAR 50/50 M-NA	60149661 AD M/M 1.1
	104160270 - PULSAR 40/80 M-NA			
104160480 - PULSAR 50/50 T-NA (3X230V) 104160680 - PULSAR 40/80 T-NA (3X230V)	60169777 AD M/T 1.0			
 60122626 - DIVERTRON 1200 M	60123662 - DIVERTRON INSTALLATION KIT - Fittings - Fixing bar pump - Ball valve - Screws			

* All kits are supplied disassembled, provided with assembly instructions

EUROSWIM

SWIMMING POOL CENTRIFUGAL PUMPS



High efficiency self-priming centrifugal pumps with built-in large capacity prefilter. Extremely quiet running and great reliability, developed for water circulation and filtration in domestic and residential swimming pools. Suitable also for special applications that call for handling of aggressive liquids, in fish farms, agriculture and industry. Pump body in fibreglass reinforced technopolymer. Strainer cover in clear antioxidant polycarbonate to guarantee constant visibility through time. Nylon strainer. Impeller in fibreglass-reinforced technopolymer developed to ensure total coverage and isolation of the motor shaft from the pumped liquid. Diffuser in reinforced technopolymer. Mechanical seal in carbon / alumina / NBR / AISI 316. Pump body O-rings in NBR, threaded fasteners and reinforcing rings in AISI 304. Butterfly drain plugs that can be removed and refitted without tools.

Asynchronous continuous duty 2-pole motor (S1) with generous range of power ratings from 0.5 HP to 3 HP, single phase and three-phase (see technical specifications). Motor casing in die cast aluminium with electrophoresis surface treatment to prevent oxidation even in aggressive environmental conditions. Baseplate supplied as standard with rubber mounts to reduce vibration transmission.

Single phase version with integral thermal and overcurrent protection and permanent split capacitor (PSC), assembled inside the terminal box for all versions.

Motor and terminal box protection rating IPX5

Insulation class F

Ball bearings

water-proof, sealed, resistant to water and humidity. Motor construction to EN 60335-2-41 standards

Standard voltage Single phase 220-240V 50Hz
Three-phase 230/400V 50Hz

Operating range

up to 42 m³/h with pressure head of up to 22 m

Pumped fluid clean water or water slightly contaminated with suspended particulate, long fibre; highly aggressive water with high percentage contents of chlorine/bromine and PHMB (Polyhexamethylene Biguanide) or water treated with chlorine electrolytic process.

Liquid temperature range up to 60°C

Maximum ambient temperature +50°C

Maximum operating pressure 2,5 bar

Installation fixed or portable in horizontal position

Special executions on request

alternative voltages and/or frequencies

Fittings on request 2"/50 - 63 kit (two fittings + O-ring - see "Accessories")

Reference standard IEC – 60364

IE3 ≥ 0,75 kW

60 dB

ACCESSORIES
PAG. 137

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA														DNA	DNM	MAX NOISE LEVEL dB (A)	WT. KG	Q.TY x PALLET
			VOLTAGE 50 Hz	P1 MAX W	P2 NOMINAL		In A	MOTOR TYPE	Q=m ³ /h		0	3	6	9	12	18	21	24	30	36	42					
EUROSWIM 50 M	60118028	472	1x220-240 V ~	900	0,33	0,5	4,2	-	H (m)	12,0	11,7	11,2	10,5	9,3	5,3						2" F	2" F	53	16	8	
EUROSWIM 75 M	60118029	483	1x220-240 V ~	1000	0,5	0,75	5	-		13,8	13,5	13,1	12,4	11,1	7,5	5						2" F	2" F	56	16,5	8
EUROSWIM 75 T	60179393	530	3x230-400 V ~	950	0,5	0,75	3,5 / 2	IE3		13,8	13,5	13,1	12,4	11,1	7,5	5						2" F	2" F	56	16,5	8
EUROSWIM 100 M	60118030	509	1x220-240 V ~	1300	0,75	1	6,3	-		15,4	15,4	15	14,2	13,1	10,0	7,8	5,6					2" F	2" F	57	17	8
EUROSWIM 100 T	60179412	557	3x230-400 V ~	1200	0,75	1	4 / 2,4	IE3		15,4	15,4	15	14,2	13,1	10,0	7,8	5,6					2" F	2" F	57	17	8
EUROSWIM 150 M	60118032	569	1x220-240 V ~	1600	1,1	1,5	7	-		16,2	15,9	15,4	14,9	14,2	12,4	11,1	9,3	5,3				2" F	2" F	59	22	6
EUROSWIM 150 T	60179850	615	3x230-400 V ~	1500	1,1	1,5	6,5 / 3,7	IE3		16,2	15,6	15,2	14,6	13,9	12,4	11,1	9,3	5,3				2" F	2" F	59	22	6
EUROSWIM 200 M	60118033	637	1x220-240 V ~	1900	1,5	2	8,6	-		18,6	18,2	17,7	17,1	16,5	15,0	14,1	12,8	9,0	4			2" F	2" F	62	24	6
EUROSWIM 200 T	60179849	687	3x230-400 V ~	1900	1,5	2	7,2 / 4	IE3		18,6	18,2	17,7	17,1	16,5	15,0	14,1	12,8	9,0	4			2" F	2" F	62	22	6
EUROSWIM 300 M	60122213	696	1x220-240 V ~	2800	2,2	3	12	-		22,0	21,9	21,7	21,3	20,8	19,6	18,9	18,1	15,9	12,5	8,6		2" F	2" F	64	24,5	6
EUROSWIM 300 T	60179851	755	3x230-400 V ~	2800	2,2	3	8,7 / 5	IE3		22,0	21,9	21,7	21,3	20,8	19,6	18,9	18,1	15,9	12,5	8,6		2" F	2" F	64	25	6

Fiyatlara KDV dahil değildir.

EUROPRO HIGH FLOW

SWIMMING POOL CENTRIFUGAL PUMPS



Self-priming, high-performance centrifugal pumps, with built-in large capacity prefilter. 2 or 4 pole motor completely isolated from the water. Extremely quiet and

highly reliable, developed for the circulation and filtration in large swimming pool filtration systems. Also suitable for particular applications that require handling

of **seawater** thanks to the mechanical seal made of AISI 316.

Prefilter body, pump body, volute, volute cover and pump body lid are made of polypropylene, resistant to chemical products found in swimming pools and

reinforced with fiber glass. Prefilter basket made of polyethylene. Prefilter lid made of transparent polycarbonate with four knobs locking system.

Closed asynchronous motor with external ventilation with 2 or 4 poles depending on the model, with a wide capacity range from 3 to 15 Hp. Terminal box with IP55 Degree of protection.

Operating range

Up to 190 m³/h with head up to 22 m

Standard Voltage

3 x 230-400V 50 Hz fino a 4 Kw

3 x 400-690V 50 Hz oltre i 4 KW

Insulation class F

Temperature range of the liquid up to 40°C

Pumped Liquid clean or slightly dirty water or a little aggressive (PolyHexamethylene Biguanide) or water treated with chlorine electrolysis process.

Maximum ambient temperature 40°C

Installation in horizontal position

Special executions on request

other frequencies and/or voltages

IE3 ≥ 0,75 kW

ACCESSORIES
PAG. 137

MODEL	CODE	PRICE €	ELECTRICAL DATA							HYDRAULIC DATA															DNA GAS	DNM GAS	KG	Q.TY x PALLET				
			VOLTAGE 50 Hz	P1 MAX W	P2 NOM.		N. rpm	In A			Q=m ³ /h		H (m)																			
					kW	HP		230	400	690	Q=l/min	0	333	1000	1333	1500	2000	2333	2666	2833	3000	3166	3250									
EUROPRO 350 T	60169120	1.806	3 x 230-400V	2,97	2,2	3	1450	9,4	5,3	-	14,7	13	6,3	2,1														110	110	42,5	3	
EUROPRO 400 T	60169121	1.845	3 x 230-400V	3,83	3	4	1450	12,5	6,9	-	16,5	14,9	8,5	4	1,6														110	110	44,5	3
EUROPRO 550 T - BR*	60169143	2.640	3 x 230-400V	5,54	4	5,5	1450	15,3	8,8	-	14	13,5	11,8	10,4	9,5	6,3	4,1												110	110	53,5	2
EUROPRO 550 T	60169123	2.065	3 x 230-400V	5,54	4	5,5	1450	15,3	8,8	-	14	13,5	11,8	10,4	9,5	6,3	4,1												110	110	53,5	2
EUROPRO 750 T - BR*	60169144	3.319	3 x 400-690V	6,85	5,5	7,5	1450	-	12	7	16,2	15,6	13,8	12,4	11,5	8,65	6,47	3,5											110	110	66	2
EUROPRO 750 T	60169124	2.797	3 x 400-690V	6,85	5,5	7,5	1450	-	12	7	16,2	15,6	13,8	12,4	11,5	8,65	6,47	3,5											110	110	66	2
EUROPRO 1000 T - BR*	60169145	3.382	3 x 400-690V	8,26	7,5	10	1450	-	16,2	9,6	17,6	17	15,4	14,2	13,5	10,8	8,6	6,1	4,7										110	110	76	2
EUROPRO 1000 T	60169139	2.878	3 x 400-690V	8,26	7,5	10	1450	-	16,2	9,6	17,6	17	15,4	14,2	13,5	10,8	8,6	6,1	4,7										110	110	76	2
EUROPRO 1250 T	60169140	3.627	3 x 400-690V	13,74	9,2	12,5	2850	-	17,9	10,1	22,4	21,5	19,4	18,1	17,4	14,7	12,6	10,3	9	7,6	5,5								110	110	84,5	2
EUROPRO 1500 T	60169142	3.670	3 x 400-690V	15,73	11	15	2850	-	19,9	11	25,5	24,5	22,4	21,3	20,6	17,4	14,8	12,1	10,6	9,1	7,4	6							110	110	85,5	2

* BRONZE IMPELLER

Fiyatlara KDV dahil değildir.

ESYBOX MAX

ELECTRONIC BOOSTER SET


NEW


esybox max

Integrated pumping system for water pressurization in commercial building service.

Available in two power sizes, the system is composed of **modular elements** that allow different configurations: single, double, triple or quadruple unit are possible, to cover the needs of medium/large condominiums and high buildings (even over 14 floors).

Each unit consists of the hydraulic connection base and the pumping unit which includes an electronic vertical multi-impeller pump, display, Wi-Fi module, pressure sensors, non-return valve on delivery and an expansion tank, all integrated.

The innovative support base of the pumping unit and the wireless communication between the pumps make it possible to **assemble the unit directly at the installation site (O.S.A. concept)** even by one person.

The variable frequency drive keeps the pressure constant by varying the frequency of the motor according to the request and also thanks to the water-cooled permanent magnet motor it allows greater efficiency and energy savings.

The large display allows easy configuration of the operating parameters with the possibility of viewing them from a smartphone (via the DConnect APP) or remotely via the DConnect service. The expansion module (esy I / O, available as an accessory) gives the possibility to interface ESYBOX max with the BMS.

Flow rate Up to 17,4 m³/h (single pump unit)

Head 113 m

Type of pumped liquid Clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral

Liquid temperature +50°C

Maximum room temperature +55°C

Maximum inlet pressure 5 bar

Nominal pressure (PN) 12 bar / 1200 kPa

Constant pressure range

1-12 bar (3 bar by default)

Motor protection class IP X5

Motor insulation class F

Impeller material Technopolymer

Single phase power input 208-240 V 50/60 Hz

Three phase power input 380-480 V 50/60 Hz

Type of installation Fixed in vertical position

Certification NSF61. WRAS and ACS are pending approval.


ONLINE TRAINING

OSA
ON SITE ASSEMBLY

DCONNECT
BUILT-IN

PAG. 9
ACCESSORIES
PAG. 352

esybox max

LINE UP TO THE FUTUTRE

discover


<https://esyboxline.com>

MODEL (only pump unit)	CODE	PRICE €	ELECTRICAL DATA			HYDRAULIC DATA														DNA GAS	DNM GAS	WT. KG	Q.TY x PALLET
			VOLTAGE 50 - 60 Hz	P1 MAX		In A	Q=m ³ /h	0	2,4	3,6	4,8	6	7,2	8,4	9,6	10,8	12,6	14,4	17,4				
				kW	HP		Q=l/min	0	40	60	80	100	120	140	160	180	200	220	240				
ESYBOX MAX 60/120 M	60199039	3.886	1x208-240 V ~	2,68	3,6	12,5-11,5	H (m)	80	79,5	77,1	73,4	68,5	62	55,5	48,2	41	30,5	21	4	1"1/4 / 2"	1"1/4 / 2"	29	6
ESYBOX MAX 60/120 T	60199035	3.886	3x380-480 V ~	2,65	3,5	4,4		80	79,5	77,1	73,4	68,5	62	55,5	48,2	41	30,5	21	4	1"1/4 / 2"	1"1/4 / 2"	29	6
ESYBOX MAX 85/120 T	60195100	4.679	3x380-480 V ~	3,5	4,7	5,6		113	110	106,5	101	93	84	75	65,5	56,7	43,5	31	8,5	1"1/4 / 2"	1"1/4 / 2"	30	6

MODEL	CODE	PRICE €	WT. KG	Q.TY x PALLET
ESYDOCK MAX	60195200	476	9	12
2 ESYDOCK MAX	60198332	825	18	6
3 ESYDOCK MAX	60198333	1.143	27	3


ESYDOCK

2 ESYDOCK

3 ESYDOCK

APPLICATIONS



CONDOMINIUM
Example: 10 floors
20 apartments

HOTEL
Example: 6 floors
80 Rooms

HOSPITAL
Example: 4 floors
100 Beds

*Indicative data. Please refer to the technical catalogue or DNA for correct sizing.

CERTIFICATIONS



**SUITABLE FOR
PUMPING WATER FROM:
NO SELF-PRIMING**


TANKS

AQUEDUCT
where permitted by law

SIBA





**HAVUZ VE HAVUZA DAİR
HERŞEY!**

NKVE 32-45-65-95

MULTISTAGE CENTRIFUGAL PUMPS WITH VERTICAL AXIS WITH INVERTER MCE/P



DAB's NKVE 32, 45, 65, 95 pumps are multi-impeller vertical centrifugal pumps with coupling with MCE-P inverter installed as standard; designed for pressurization in civil and commercial environments' they can also be used in agriculture and in watering systems.

For the recirculation of water in heating and air conditioning systems. They are particularly versatile, thanks to the use of the MCE-P inverter, which ensures performance levels capable of automatically adapting to the different needs of the system, keeping a constant pressure. Pressure sensor supplied as standard.

Pump body and upper flange in cathophoretic paint coated cast iron; impellers, diffusers and pump liner made of AISI 304 stainless steel (AISI 316 stainless steel available on request - X version).

Versatility, thanks to the centre distance between the 2 in-line ports, designed to maximise interchangeability. Starting from 5.5 kW models, the silicon carbide-graphite mechanical seal can be removed without removing the motor. Mechanical seals for aggressive liquids and different connections also available (round, oval, Victaulic, clamp flanges).

All the AISI 316 stainless steel - X version - models are certified for use with drinking water (WRAS and ACS certified).

Pumps coupled by rigid coupling to IE3 high energy efficiency electric motors.

Operating range

From 1 m³/h to 120 m³/h with head up to 320 m

Type of pumped liquid Clean, free of solids and abrasive substances, non-viscous, non-aggressive, non-crystallised and chemically neutral

Maximum % of glycol 30%

Min. and max. supported liquid temperature

From -30 to +120°C (EPDM)

From -15°C to +120°C (Viton/FKM)

Class of protection IP 55

Motor insulation class F

Impeller/s material

AISI 304 stainless steel

AISI 316 for NKV X only on request

Single phase power input 1x230 V up to 2,2 kW

Three phase power input

380 - 415 V at 50 Hz from 3 kW

Possible type of installation Vertical position

Special versions on request

Yes, available with different types of mechanical seals for aggressive liquids and connections (round, oval, Victaulic, clamp flanges), **with parts in contact with the liquid in AISI 316 stainless steel (X versions)**, other voltages and frequencies, ATEX version



IE3 ≥ 0,75 kW



PAG. 9

MCE/P
PAG. 27

ACCESSORIES
PAG. 215

	NKVE 32	/	13	-	2		X		300		E1		IE3
NOMINAL FLOW RATE (m ³ /h)													
NUMBER OF STAGES/IMPELLERS													
NUMBER AND TYPE OF TURNED IMPELLER													
MATERIALS*: " =CAST IRON/AISI 304; X=AISI 316													
MOTOR POWER P2 KW X 10 (300 = 30KW)													
Type of mechanical seal (E1=STANDARD)													
E1=BQGE=Carbon/Silicon carbide/AISI 316/EPDM STD													
E2=QQGE=Silicon Carbide/Silicon Carbide/AISI 316/EPDM													
V3=QQGV=Silicon Carbide/Silicon Carbide/AISI 316/FKM-Viton													
V4=BQGV= Carbon/Silicon carbide /AISI 316/ FKM-Viton													
E5=UUGE=Tungsten carbide/Tungsten carbide/AISI 316/EPDM													
Motor efficiency													

*MATERIALS:

"X" version with pump body/impellers/diffusers in AISI 316 stainless steel

" " standard version with pump body in cast iron and impellers in AISI 304 stainless steel

KVC / KVCX

MULTISTAGE CENTRIFUGAL PUMPS WITH VERTICAL AXIS



KVC



KVCX

Vertical multistage centrifugal pump suitable for use in small and medium water supply installations.

Suitable for pressurization units, surge tank supply, rain irrigation and crop-dusting systems, fire-fighting and washing systems, conveyance of condensate and cooling water.

Innovative and robust design.

Technopolymer discharge/suction bodies and in-line suction and discharge ports with threaded metal insert.

Impellers, diffuser bodies and diffusers in technopolymer, fully rust-proof. Stainless steel AISI 303 pump jacket, adjustment rings and seal disk.

Silicon carbide/Carbon graphite mechanical seal, fitted on the AISI 303 stainless-steel drive shaft extension.

Asynchronous, closed motor cooled by external ventilation. Rotor mounted on oversized greased sealed-for-life ball bearings to ensure silent running and long life.

Built-in thermal and current overload protection and a capacitor permanently on in the singlephase version.

Protection for the three-phase version is the responsibility of the user. Built in CEI 2-3/CEI 61/69 (EN 60335-2-41) standards.

Level of protection IP 55

Insulation class F

Standard voltage

Single-phase 220-240 V / 50 Hz

Three-phase 230-400 V / 50 Hz

Operating range

from 50 to 200 litre/min. with head up to 113 m.

Pumped liquid clean, free from solids or abrasive substances, not viscous, not aggressive, not crystallised and chemically neutral and close to the characteristics of water.

Liquid temperature range

from 0°C to +35°C for domestic use

(EN 60335-2-41 safety standards).

from 0°C to +40°C for other uses.

Maximum ambient temperature +40°C

Maximum working pressure 12 bar (1200 kPa).

Installation fixed, in vertical or horizontal position. Providing that the motor is positioned above the pump.

Special versions on request

Other voltages and/or frequencies.



IE3 ≥ 0,75 kW

ACCESSORIES
PAG. 215

KVC

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA												DNA GAS	DNM GAS	H mm	WEIGHT Kg
			VOLTAGE 50 Hz	P2 NOMINAL		In A	MOTOR TYPE	Q=m³h Q=l/min														
				kW	HP				0	0,6	1,2	1,8	2,4	3	3,3	3,9	4,8					
KVC 15-30 M	60183593	468	1 x 220 - 240V ~	0,25	0,33	2,8	-	21,5	21,3	20,5	19,0	16,9	14,2	12,6	8,9		1"¼	1"¼	505	14,7		
KVC 15-30 T	60183594	463	3 x 230 / 400V ~	0,25	0,33	2,3-1,3	-	21,5	21,3	20,5	19,0	16,9	14,2	12,6	8,9		1"¼	1"¼	505	14,7		
KVC 25-30 M	60183412	478	1 x 220 - 240V ~	0,37	0,5	3,4	-	29,0	28,6	27,4	25,3	22,4	18,5	16,3	10,7		1"¼	1"¼	505	14,7		
KVC 25-30 T	60183416	473	3 x 230 / 400V ~	0,37	0,5	1,5-2,5	-	29,0	28,6	27,4	25,3	22,4	18,5	16,3	10,7		1"¼	1"¼	505	14,7		
KVC 35-30 M	60183595	491	1 x 220 - 240V ~	0,45	0,6	4,1	-	40,2	39,3	37,3	34,1	29,8	24,3	21,0	13,5		1"¼	1"¼	560	14,5		
KVC 35-30 T	60183596	486	3 x 230 / 400V ~	0,45	0,6	2,8-1,6	-	40,2	39,3	37,3	34,1	29,8	24,3	21,0	13,5		1"¼	1"¼	560	14,5		
KVC 45-30 M	60183413	509	1 x 220 - 240V ~	0,75	1	5,2	-	49,7	48,7	46,5	43,1	38,4	32,1	28,5	19,6		1"¼	1"¼	560	14,9		
KVC 45-30 T	60183417	500	3 x 230 / 400V ~	0,55	0,75	3-1,7	-	47,1	45,9	43,5	39,8	34,7	28,0	24,0	14,7		1"¼	1"¼	560	14,9		
KVC 50-30 M	60183597	568	1 x 220 - 240V ~	0,75	1,0	6	-	61,5	59,9	56,8	52,2	46,0	38,0	33,5	22,7		1"¼	1"¼	652	17,5		
KVC 50-30 T	60183599	618	3 x 230 / 400V ~	0,75	1,0	3,7-2,2	IE3	61,5	59,9	56,8	52,2	46,0	38,0	33,5	22,7		1"¼	1"¼	652	17,5		
KVC 60-30 M	60183414	590	1 x 220 - 240V ~	1	1,36	6,7	-	69,6	67,6	64,0	58,5	51,1	41,8	36,2	23,8		1"¼	1"¼	652	17,3		
KVC 60-30 T	60183600	641	3 x 230 / 400V ~	0,8	1,1	3,9-2,3	IE3	69,6	67,6	64,0	58,5	51,1	41,8	36,2	23,8		1"¼	1"¼	652	17,3		
KVC 65-30 M	60183415	618	1 x 220 - 240V ~	1	1,36	7,3	-	78,4	76,8	73,5	68,4	61,2	51,9	46,0	33,3		1"¼	1"¼	679	18,9		
KVC 65-30 T	60183601	670	3 x 230 / 400V ~	1	1,36	4,4-2,6	IE3	78,4	76,8	73,5	68,4	61,2	51,9	46,0	33,3		1"¼	1"¼	679	18,5		
KVC 20-50 M	102990360	479	1 x 220 - 240 V ~	0,37	0,5	2,5	-	27,4	26,9	26,0	24,9	23,1	21,1	19,8	16,9	11,4	1"¼	1"¼	450	13,5		
KVC 20-50 T	102990370	474	3 x 230 / 400 V ~	0,37	0,5	1,7-1,0	-	27,4	26,9	26,0	24,9	23,1	21,1	19,8	16,9	11,4	1"¼	1"¼	450	13,5		
KVC 30-50 M	102990100	493	1 x 220 - 240 V ~	0,55	0,75	4	-	41,1	40,3	39,0	37,3	34,7	31,6	29,7	25,3	17,1	1"¼	1"¼	478	13,7		
KVC 30-50 T	102990110	488	3 x 230 / 400 V ~	0,55	0,75	2,4-1,4	-	41,1	40,3	39,0	37,3	34,7	31,6	29,7	25,3	17,1	1"¼	1"¼	478	13,7		
KVC 40-50 M	102990120	524	1 x 220 - 240 V ~	0,8	1,1	5,6	-	54,9	53,7	52,0	49,7	46,3	42,1	39,6	33,7	22,9	1"¼	1"¼	505	15,8		
KVC 40-50 T	60179400	566	3 x 230 / 400 V ~	0,8	1,1	3,8-2,2	IE3	54,9	53,7	52,0	49,7	46,3	42,1	39,6	33,7	22,9	1"¼	1"¼	505	15,8		
KVC 55-50 M	102990140	547	1 x 220 - 240 V ~	1	1,36	6,4	-	68,6	67,1	65,0	62,1	57,9	52,7	49,5	42,1	28,6	1"¼	1"¼	533	17,0		
KVC 55-50 T	60179398	595	3 x 230 / 400 V ~	1	1,36	4,4-2,6	IE3	68,6	67,1	65,0	62,1	57,9	52,7	49,5	42,1	28,6	1"¼	1"¼	533	17,0		
KVC 65-50 M	102990160	667	1 x 220 - 240 V ~	1,1	1,5	7,4	-	82,3	80,6	78,0	74,6	69,4	63,2	59,4	50,6	34,3	1"¼	1"¼	600	20,2		
KVC 65-50 T	60179914	714	3 x 230 / 400 V ~	1,1	1,5	7-4	IE3	82,3	80,6	78,0	74,6	69,4	63,2	59,4	50,6	34,3	1"¼	1"¼	600	19,8		
KVC 75-50 M	102990180	689	1 x 220 - 240 V ~	1,5	2	9	-	96,0	94,0	91,0	87,0	81,0	73,8	69,3	59,0	40,0	1"¼	1"¼	627	21,2		
KVC 75-50 T	60179915	740	3 x 230 / 400 V ~	1,5	2	7,7-4,3	IE3	96,0	94,0	91,0	87,0	81,0	73,8	69,3	59,0	40,0	1"¼	1"¼	627	20,6		

Fiyatlarla KDV dahil değildir.

KVC / KVCX

MULTISTAGE CENTRIFUGAL PUMPS WITH VERTICAL AXIS



IE3 ≥ 0,75 kW

KVC

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA																				DNA GAS	DNM GAS	H mm	Weight Kg	
			VOLTAGE 50 Hz	P2 NOMINAL		In A	MOTOR TYPE	Q=m³h		Q=l/min																					
				kW	HP			0	0,6	1,2	1,8	2,4	3	3,3	3,9	4,8	5,4	6	7,2	8,4	9	10,8	12								
KVC 20-80 M	60183688	497	1 x 220 - 240V ~	0,55	0,75	4,2	-	25,0	24,8	24,4	23,8	23,1	22,3	21,5	20,5	19	17,3	16	11,9	7,4	4,8				G 1" ¼	G 1" ¼	505	14,7			
KVC 20-80 T	60183405	492	3 x 230 / 400V ~	0,55	0,75	2,8-1,6	-	25,0	24,8	24,4	23,8	23,1	22,3	21,5	20,5	19	17,3	16	11,9	7,4	4,8				G 1" ¼	G 1" ¼	505	14,7			
KVC 30-80 M	60183401	528	1 x 220 - 240V ~	1	1,36	6,5	-	36,9	36,9	36,6	36,1	35,3	34,3	33,6	32,2	29,5	27,8	25,5	20,3	14,2	10,7				G 1" ¼	G 1" ¼	505	13,7			
KVC 30-80 T	60183411	567	3 x 230 / 400V ~	1	1,36	3,9-2,3	IE3	36,9	36,9	36,6	36,1	35,3	34,3	33,6	32,2	29,5	27,8	25,5	20,3	14,2	10,7				G 1" ¼	G 1" ¼	505	13,9			
KVC 40-80 M	60183402	553	1 x 220 - 240V ~	1,1	1,5	7,4	-	50,1	49,7	49,0	48,0	46,7	45,1	44,2	42	38,5	35,7	32,5	25,5	17,1	12,5				G 1" ¼	G 1" ¼	560	18			
KVC 40-80 T	60183804	593	3 x 230 / 400V ~	1	1,5	4,6-2,7	IE3	50,1	49,7	49,0	48,0	46,7	45,1	44,2	42	38,5	35,7	32,5	25,5	17,1	12,5				G 1" ¼	G 1" ¼	560	17,6			
KVC 45-80 M	60183403	676	1 x 220 - 240V ~	1,6	2,2	9,7	-	64,6	64,5	63,9	63,0	61,7	60,0	59,0	56,7	52,5	49,3	45	37,1	26,8	21,1				G 1" ¼	G 1" ¼	634	18			
KVC 45-80 T	60183805	726	3 x 230 / 400V ~	1,6	2,2	6,2-3,6	IE3	64,6	64,5	63,9	63,0	61,7	60,0	59,0	56,7	52,5	49,3	45	37,1	26,8	21,1				G 1" ¼	G 1" ¼	634	17,6			
KVC 55-80 M	60183404	699	1 x 220 - 240V ~	1,85	2,5	11,2	-	76,1	75,8	75,1	73,9	72,2	70,0	68,5	66	60,5	56,7	52	41,8	29,5	22,7				G 1" ¼	G 1" ¼	727	22			
KVC 55-80 T	60183806	748	3 x 230 / 400V ~	1,85	2,5	7-4,1	IE3	76,1	75,8	75,1	73,9	72,2	70,0	68,5	66	60,5	56,7	52	41,8	29,5	22,7				G 1" ¼	G 1" ¼	727	22,1			
KVC 65-80 T	60183807	782	3 x 230 / 400V ~	2,2	3	8,3-4,8	IE3	88,6	88,0	86,9	85,5	83,5	81,2	80,0	76,5	71	67,0	62	51,1	37,9	30,5				G 1" ¼	G 1" ¼	727	22,1			
KVC 25-120 M	102990400	547	1 x 220 - 240 V ~	1	1,36	6,5	-	30,4	30,3	30,2	30,0	29,9	29,6	29,3	28,7	27,7	26,9	25,9	23,2	19,9	18,2	12,0	7,0		G 1" ¼	G 1" ¼	450	17,0			
KVC 25-120 T	60179878	587	3 x 230 / 400 V ~	1	1,36	5-2,9	IE3	30,4	30,3	30,2	30,0	29,9	29,6	29,3	28,7	27,7	26,9	25,9	23,2	19,9	18,2	12,0	7,0		G 1" ¼	G 1" ¼	450	17,1			
KVC 35-120 M	102990420	614	1 x 220 - 240 V ~	1,1	1,5	7,4	-	46,2	46,1	45,7	45,3	44,8	44,0	43,7	42,7	40,9	39,3	37,4	33,7	29,4	26,8	18,0	11,0		G 1" ¼	G 1" ¼	480	20,1			
KVC 35-120 T	60179872	657	3 x 230 / 400 V ~	1,1	1,5	6,4-3,7	IE3	46,2	46,1	45,7	45,3	44,8	44,0	43,7	42,7	40,9	39,3	37,4	33,7	29,4	26,8	18,0	11,0		G 1" ¼	G 1" ¼	480	20,2			
KVC 45-120 M	102990440	762	1 x 220 - 240 V ~	1,85	2,5	12	-	62,4	62,0	61,4	60,8	60,1	59,1	58,6	57,5	55,3	53,4	51,4	46,2	40,6	37,5	26,3	17,0		G 1" ¼	G 1" ¼	507	20,2			
KVC 45-120 T	60179863	815	3 x 230 / 400 V ~	1,85	2,5	7,6-4,4	IE3	62,4	62,0	61,4	60,8	60,1	59,1	58,6	57,5	55,3	53,4	51,4	46,2	40,6	37,5	26,3	17,0		G 1" ¼	G 1" ¼	507	21,9			
KVC 60-120 T	60179867	838	3 x 230 / 400 V ~	2,2	3	9-5,2	IE3	78,0	77,5	76,7	75,9	75,1	73,9	73,3	71,5	68,3	65,9	63,2	58,0	51,0	47	35,0	24,5		G 1" ¼	G 1" ¼	610	21,6			
KVC 70-120 T	60179876	889	3 x 230 / 400 V ~	3	4	10,9-6,3	IE3	95,0	94,3	93,4	92,5	91,4	89,8	88,9	86,8	83,2	80,5	77,9	71,7	63,9	59,2	44,0	31,0		G 1" ¼	G 1" ¼	675	24,0			
KVC 85-120 T	60179865	935	3 x 230 / 400 V ~	3	4	12,3-7,1	IE3	112,7	111,6	110,3	109,0	107,6	105,7	104,5	101,9	97,5	94,1	89,9	81,6	72,1	66,7	48,9	34,0		G 1" ¼	G 1" ¼	702	25,0			

Fiyatlara KDV dahil değildir.



SUBMERSIBLE PUMPS

WHEN THE GOING GETS TOUGH...



WATER • TECHNOLOGY

FX.DABPUMPS.COM



NOVA
SUBMERSIBLE PUMPS FOR DRAINAGE
A7 **PAG. 220**



FEKA FXV
SUBMERSIBLE PUMPS FOR SEWAGE
FS **PAG. 228**



FEKAFOS 280 DOUBLE
AUTOMATIC LIFTING STATION
CK **PAG. 241**



NOVA UP
SUBMERSIBLE PUMPS
A7 **PAG. 221**



FEKA FXC
SUBMERSIBLE PUMPS FOR EFFLUENT
FS **PAG. 230**



FEKAFOS 550 DOUBLE
AUTOMATIC LIFTING STATION
CK **PAG. 242**



NOVA UP MAE
SUBMERSIBLE PUMPS
A7 **PAG. 221**



FK
SUBMERSIBLE PUMPS
EM **PAG. 233**



FEKAFOS MAXI 1200/3600
AUTOMATIC LIFTING STATION
CK **PAG. 243**



VERTY NOVA
INTEGRATED FLOAT SWITCH
SUBMERSIBLE PUMPS
A7 **PAG. 222**



**FEKA 6200/6300/8100/
8200/8300**
SEWAGE PUMPS
CE CF **PAG. 236**



FEKAFOS MAXI 1100/2780 **NEW**
AUTOMATIC LIFTING STATION
CK **PAG. 244**



FEKA
SUBMERSIBLE PUMPS FOR EFFLUENT
CG **PAG. 223**



GENIX
AUTOMATIC LIFTING STATIONS
DC **PAG. 237**



NOVAIR
SUBMERGED AERATOR
AK **PAG. 252**



FEKA BVP
SEWAGE PUMPS
AF **PAG. 224**



GENIX VT
AUTOMATIC LIFTING STATIONS
DC **PAG. 238**



ACCESSORIES
PAG. 253



DRENAG 1000 - 1200
SUBMERSIBLE PUMPS
C8 **PAG. 224**



NOVABOX
SMALL LIFTING STATIONS FOR AUTOMATIC
COLLECTING AND PUMPING SEWAGE
AE **PAG. 239**



EBOX
ELECTRONIC PROTECTION
AND CONTROL PANEL
AT **PAG. 259**



FEKA VS
SEWAGE PUMPS
CJ **PAG. 225**



FEKABOX 110
AUTOMATIC LIFTING STATION
CK **PAG. 239**



PANELS
PAG. 264



DRENAG FX
SUBMERSIBLE PUMPS FOR DRAINAGE
OF SANDY WATER AND WATER FROM
CONSTRUCTION SITE
FS **PAG. 226**



FEKABOX 200
AUTOMATIC LIFTING
STATION
CK **PAG. 240**



GRINDER FX
SUBMERSIBLE PUMPS WITH
CUTTING SYSTEM FOR SEWAGE
FS **PAG. 227**



FEKAFOS 280
AUTOMATIC LIFTING STATION
CK **PAG. 241**

NOVA

SUBMERSIBLE PUMPS FOR DRAINAGE



NOVA M-A



NOVA M-NA

Submersible pump for drainage also rainwater in residential building service. The Nova series has been redesigned to mark forty years of commercialization, making it even more reliable, resistant and ergonomic. It can also be used for emptying tanks or cisterns.

It is suitable for fixed or portable installations and it is available in the automatic version with the integrated float switch or in the manual version without the float. The pump is suitable for draining flooded basements, cellars and garages or to prevent flooding when installed in rainwater collection wells, and can be used as a portable pump in emergency situations to drain water from flooded premises. A 90° fitting is provided for vertical delivery. The pump body, the impeller and the suction grid are in technopolymer, the motor shaft in AISI 431 is suitable for light salty water. Thermal protection incorporated in all single-phase versions. It can work in dry run for up to 1 minute. 10 mm free passage.

New sealed cable gland design and new motors, more compact and efficient. Impeller bolt sealing to prevent corrosion at bolt motor shaft.

In compliance with the European standard EN 60335-2-41 in case of external use the 10 meter power cable is mandatory.

Flow rate minimum and maximum

from 1 m³/h to 16 m³/h

Head up to 10,2 m

Type of pumped liquid Drainage water, mostly celan, rainwater

Free passage

5 mm or 10 mm depending on the model

Supported liquid temperature (maximum and minimum)

From +0°C to +35°C for domestic use
From +0°C to +50° C other use

Outlet connection Threated 1" 1/4

Impeller material Technopolymer

Class of protection IP 68

Motor insulation class F

Dry run time 1 minute

Possible type of installation

Fixed or portable in vertical position



YEARS
ANNIVERSARY
Celebration

REPLACEMENT
TABLE
PAG. 232

PANELS
PAG. 264

ACCESSORIES
PAG. 253

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA					DNM GAS	CABLE*	WEIGHT KG	Q.TY x PALLET	
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	3	6	9					12
					kW	HP		Q=l/min	0	50	100	150					200
NOVA 180 M A 40th	60195073	161	1X230 V~	0,19	0,2	0,27	0,9	H (m)	5	3,2				1" ¼	5m H05	4,6	48
NOVA 180 M A 40th	60198013	176	1X230 V~	0,19	0,2	0,27	0,9		5	3,2				1" ¼	10m H05	4,6	48
NOVA 180 M NA 40th	60195632	163	1X230 V~	0,19	0,2	0,27	0,9		5	3,2				1" ¼	10m H05	4,6	48
NOVA 200 M NA 40th	60194402	197	1X230 V~	0,35	0,22	0,30	1,5		7,1	5,6	4,2	2,8	1,5	1" ¼	10m H05	4,6	48
NOVA 300 M A 40th	60194400	198	1X230 V~	0,35	0,22	0,29	1,5		7,2	5,8	4,6	3,4	2,2	1" ¼	5m H05	4,6	48
NOVA 300 M A 40th	60198014	214	1X230 V~	0,35	0,22	0,29	1,5		7,2	5,8	4,6	3,4	2,2	1" ¼	10m H05	4,6	48
NOVA 600 M A 40th	60191566	293	1X230 V~	0,66	0,5	0,67	3,0		10,4	9	7,8	6,7	5,3	1" ¼	5m H05	7	32
NOVA 600 M A 40th	60198015	313	1X230 V~	0,66	0,5	0,67	3,0		10,4	9	7,8	6,7	5,3	1" ¼	10m H05	7	32
NOVA 600 M NA 40th	60195636	308	1X230 V~	0,66	0,5	0,67	3,0		10,4	9	7,8	6,7	5,3	1" ¼	10m H05	7	32
NOVA 600 T NA 40th	60196306	285	3X400 V~	0,66	0,5	0,67	1,7		10,4	9	7,8	6,7	5,3	1" ¼	10m H07	7	32

A= automatic with float

NA= non automatic without float

*As per European standard EN 60335-2-41, for outdoor use power cable must be 10m long.

Fiyatlara KDV dahil değildir.

NOVA UP

SUBMERSIBLE PUMPS



NOVA UP M-A

NOVA UP M-NA

Vertical flow drainage pump in an automatic or manual version with removable filter for suction up to 2/3 mm, features that make it a strong pump and allow for installation versatility.

These pumps can be used with liquids that contain solids of a maximum size up to 10 mm.

Pump body, impeller, Cap and grille in technopolymer.

The motor, rotor shaft and screws in stainless steel.

Triple O-ring seal with interposed oil Chamber.

Asynchronous submersible motor for continuous operation. Stator in a sealed stainless steel enclosure.

Rotor mounted on ball bearings greased for life and oversized.

Thermal-ampometersc protection incorporated and condenser permanently connected.

Operating range

from 1 to 15 m³/h with prevalence up to 10 meters.

Temperature range of the liquid

from 0 °C to +35 °C for domestic use.

Pumped liquid temperature

murky waters without fibers

Minimum depth of draft

NOVA UP-300M - 120 mm

NOVA UP 300M - 60 mm

NOVA UP 600M - 165 mm

NOVA UP 600M - 70 mm

Maximum immersion depth

7 meters.

Installation

vertical, fixed or portable.

Degree of protection

IP 68.

Insulation class

F

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA															DNM GAS	CABLE	WEIGHT KG	Q.TY x PALLET
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	1	2	3	4,5	5	6	7	7,5	9	10	12	13,5				
					kW	HP		Q=l/min	0	16,6	33,3	50	75	83,3	100	116,6	125	150	166,6	200	225				
NOVA UP 300 M-A	60152305	211	1X220-240 V~	0,38	0,21	0,28	1,5	H (m)	7,6	6,9	6,25	5,6	4,7	4,4	3,6	2,8	2,3	1				1" ¼	10 mt.	5,8	39
NOVA UP 300 M-NA	60152309	205	1X220-240 V~	0,38	0,21	0,28	1,5		7,6	6,9	6,25	5,6	4,7	4,4	3,6	2,8	2,3	1				1" ¼	10 mt.	5,6	39
NOVA UP 600 M-A	60152306	317	1X220-240 V~	0,77	0,52	0,69	3,5		9,8	9,4	9	8,5	7,7	7,4	6,8	6,2	5,9	4,7	3,9	2	0,3	1" ¼	10 mt.	7,3	26
NOVA UP 600 M-NA	60152310	309	1X220-240 V~	0,77	0,52	0,69	3,5		9,8	9,4	9	8,5	7,7	7,4	6,8	6,2	5,9	4,7	3,9	2	0,3	1" ¼	10 mt.	7,1	26

A= automatic with float NA= non automatic without float

NOVA UP MAE

SUBMERSIBLE PUMPS



NOVA UP MAE

NOVA UP MAE

Electronic pump drainage with vertical adjustable (automatic or manual) with removable filter for suction up to 2/3 mm. The adjustment slider of the probes, allows you to vary the level of on-off of the pump, this feature increases the versatility of installation.

The vertical delivery and the electronic float make it a pump suitable for use in wells of small dimensions.

These pumps can be used with liquids containing solids up to 10 mm maximum size.

Pump body, impeller, cap and grille in technopolymer.

The motor, rotor shaft and screws in stainless steel.

Triple O-ring seal with interposed oil chamber.

Asynchronous submersible motor for continuous operation. Stator in a sealed stainless steel enclosure.

Rotor mounted on ball bearings greased for life and oversized.

Thermal-ampometersc protection incorporated and condenser permanently connected.

Operating range

from 1 to 15 m³/h-with prevalence up to 10 meters.

Temperature range of the liquid

from 0 °C to +35 °C for domestic use.

Pumped liquid temperature

murky waters without fibers

Minimum depth of draft

NOVA UP 300 M-AE 60 mm

NOVA UP 600 M-AE 70 mm

Maximum immersion

7 meters.

Installation

vertical, portable or fixed.

Degree of protection

IP 68.

Insulation class

F.

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA															DNM GAS	CABLE	WEIGHT KG	Q.TY x PALLET
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	1	2	3	4,5	5	6	7	7,5	9	10	12	13,5				
					kW	HP		Q=l/min	0	16,6	33,3	50	75	83,3	100	116,6	125	150	166,6	200	225				
NOVA UP 300 M-AE	60153572	234	1X220-240 V~	0,38	0,21	0,28	1,5	H (m)	7,6	6,9	6,25	5,6	4,7	4,4	3,6	2,8	2,3	1				1" ¼	10 mt.	5,6	39
NOVA UP 600 M-AE	60153573	339	1X220-240 V~	0,77	0,52	0,69	3,5		9,8	9,4	9	8,5	7,7	7,4	6,8	6,2	5,9	4,7	3,9	2	0,3	1" ¼	10 mt.	7,3	26

A= automatic with float E= Electronic

Fiyatlara KDV dahil değildir.

*Yaklaşan kış
keyfinizi kaçırmayın!*



**HEAT PUMP
(VERSATI ISI POMPASI)**

SIBA

VERTY NOVA

INTEGRATED FLOAT SWITCH SUBMERSIBLE PUMPS



Submersible pumps specifically designed for uses in narrow pits with dimensions down to 20 cm x 20 cm. Suitable to pump clear water containing particles with maximum diameter up to 5 mm.

Pump with built-in float switch

Anti-corrosive and rust-proof materials.

Integrated float switch.

Low suction capability: 2 – 3 mm (manual mode).

Very low priming and starting level of the pump: 10 – 15 mm (manual mode).

Knob for manual or automatic operation.

Easy access through sliding cover to float switch for cleaning.

Motor with thermal overload protection.

Excellent cooling of the motor that enables the pump to operate even when it is partially submersible.

Supplied with power cable with plug, non return valve and 4-step fitting.

Operating range

from 1 to 10m³/h with head up to 9 metres.

Liquid temperature range

from 0 °C to +35 °C for domestic use.

Pumped liquid dirty water without fibres.

Pump priming limit

10-15 mm in manual operation.

Max. immersion depth 7 metres.

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA														DNM GAS	CABLE	WEIGHT KG	Q.TY x PALLET
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	1	2	3	4,5	5	6	7	7,5	9	10					
					kW	HP		Q=l/min	0	16,6	33,3	50	75	83,3	100	116,6	125	150	166,6					
VERTY NOVA 200 M	60122636	197	1X230 V~	0,3	0,2	0,28	1,3	H (m)	6,9	6,5	6	5,8	4,5	4	3	1,8				1" ¼	10 mt.	4,2	40	
VERTY NOVA 400 M	60122637	216	1X230 V~	0,6	0,4	0,55	2,6	H (m)	9	8,8	8,5	8,1	7,8	7	6,7	6	5,7	4,2	3,5	1" ¼	10 mt.	5,1	40	

Fiyatlara KDV dahil değildir.

FEKA

SUBMERSIBLE PUMPS FOR EFFLUENT



FEKA M-A



FEKAM-NA



YEARS
ANNIVERSARY
Celebration

Submersible pumps suitable for draining and lifting effluent wastewater and rainwater in residential building service.

The pumps have been redesigned on the occasion of the forty years of marketing, making them even more reliable, resistant and ergonomic.

The impeller in technopolymer allows the passage of solid bodies up to 25 mm. The pumps are designed for fixed or mobile installations and are available in automatic versions with integrated float switch or in manual version without float.

The pump body and the intake grid are in technopolymer, the motor shaft in AISI 431 is suitable for light salty water. Robust and reliable, they have a triple ring seal in oil bath and an asynchronous submersible motor with continuous service. Stator inserted in an airtight stainless steel casing and rotor mounted on oversized ball bearings to increase its durability. Thermal protection incorporated in all single-phase versions, the pumps can run dry for up to 1 minute. New sealed cable gland design and new motors, more compact and efficient. Impeller bolt sealing to prevent corrosion at bolt motor shaft.

In compliance with European standard EN 60335-2-41, the 10-meter power cable is mandatory for the pump in external use.

Flow rate minimum and maximum

Da 1 m³/h a 16 m³/h

Head up to 7,5 m

Type of pumped liquid wastewater and rainwater

Free passage 25 mm

Supported liquid temperature (maximum and minimum)

From 0°C to +35°C for domestic use

Class of protection IP 68

Motor insulation class F

Possible type of installation

Fixed or portable in vertical position

REPLACEMENT
TABLE
PAG. 232

PANELS
PAG. 264

ACCESSORIES
PAG. 253

FEKA 300

MODEL	CODE	PRICE €
FEKA 300 M A 40th	60191897	245
FEKA 300 M A 40th	60198016	262
FEKA 300 M NA 40th	60195558	253

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA					DNM GAS	CABLE*	WEIGHT KG	Q.TY x PALLET		
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	Q=m ³ /h	0	3	6					9	12
					KW	HP		Q=l/min	0	50	100					150	200
FEKA 300 M A 40th	60191897	245	1X230 V~	0,35	0,22	0,30	1,9	H (m)	6,4	5,5	4,4	3,1	1,6	1" ¼	5m H05	4,6	48
FEKA 300 M A 40th	60198016	262	1X230 V~	0,35	0,22	0,30	1,9		6,4	5,5	4,4	3,1	1,6	1" ¼	10m H05	4,6	48
FEKA 300 M NA 40th	60195558	253	1X230 V~	0,35	0,22	0,30	1,9		6,4	5,5	4,4	3,1	1,6	1" ¼	10m H05	4,6	48

A: automatic with float
NA: non automatic without float

* As per European standard EN 60335-2-41, for outdoor use power cable must be 10m long.

FEKA 600

MODEL	CODE	PRICE €
FEKA 600 M A 40th	60190343	289
FEKA 600 M A 40th	60198017	309
FEKA 600 M NA 40th	60194419	298
FEKA 600 T NA 40th	60196308	274

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA						DNM GAS	CABLE*	WEIGHT KG	Q.TY x PALLET		
			VOLTAGE 50 Hz	P1 MAX KW	P2 NOMINAL		In A	Q=m ³ /h	0	3	6	9					12	15
					KW	HP		Q=l/min	0	50	100	150					200	250
FEKA 600 M A 40th	60190343	289	1X230 V~	0,68	0,5	0,67	3,1	H (m)	8,9	8,2	7,2	6,1	4,7	2,9	1" ¼	5m H05	7	32
FEKA 600 M A 40th	60198017	309	1X230 V~	0,68	0,5	0,67	3,1		8,9	8,2	7,2	6,1	4,7	2,9	1" ¼	10m H05	7	32
FEKA 600 M NA 40th	60194419	298	1X230 V~	0,68	0,5	0,67	3,1		8,9	8,2	7,2	6,1	4,7	2,9	1" ¼	10m H05	7	32
FEKA 600 T NA 40th	60196308	274	3X400 V~	0,68	0,5	0,67	1,8		8,9	8,2	7,2	6,1	4,7	2,9	1" ¼	10m H07	7	32

A: automatic with float
NA: non automatic without float

* As per European standard EN 60335-2-41, for outdoor use power cable must be 10m long.

Fiyatlara KDV dahil değildir.

Sauna keyfini evinizde yaşayın...



SAUNA, BUHAR ODASI
ve HAMAM İMALATI

SIBA

FEKA VS

SEWAGE PUMPS



Submersible centrifugal pump with liquid vortex cast steel impeller, suitable for pumping sewer water and waste water in general containing solids up to a maximum size of 50 mm.

Handle with insulating rubber cover. AISI 316 stainless steel drive shaft. Double mechanical seal with intermediate oil chamber (atoxic oil), in carbon/alumina on the motor side and silicon carbide/silicon carbide on the pump side.

Dry, asynchronous, sealed and cooled by the pumped liquid. Rotor mounted on greased for-life ball bearings, oversized and selected to guarantee greater noise reduction and duration. Thermo-amperometersc protection as standard for single-phase version, and the user's responsibility for the three-phase version. Constantly active capacitor on the single-phase version. Construction in accordance with the IEC 2-3 IEC 61-69 (EN 60335-2-41) standards.

Motor protection class IP 68

Insulation class F

Standard voltage

220-240V 50Hz Single-phase

400V 50Hz Three-phase

Continual running with liquid at 35 °C and pump completely submersible. The single-phase version can be supplied with float for automatic function.

Power supply cable 10 mt of H07RN-F cable with Shuko plug for the single-phase version and 10 meters of H07RN-F cable for the three-phase version.

Operating range

from 0 to 32 m³/h with head up to 14 mt

Pumped liquid sewer water and waste water in general and non aggressive.

Liquid temperature range from 0°C to +35°C for household use (EN 60335-2-41), from 0°C to +50°C for other uses.

Maximum ambient temperature for pump

running with submersible motor +40°C

Maximum immersion depth 10 mt

Installation fixed or portable, vertical.

Free Passage 50 mm

PANELS
PAG. 264

ACCESSORIES
PAG. 253

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA													DNM GAS	FREE PASSAGE mm	CABLE*	WEIGHT KG	Q.TY x PALLET
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	3	6	9	12	15	18	24	30	Q=l/min	0	50					
FEKA VS 550 M-A	103040000	481	1X220 - 240 V~	0,92	0,55	0,75	4,2	H (m)	7,4	6,9	6,2	5,6	4,1	3,2	1,8			2"	50	10m H07	16,3	24			
FEKA VS 550 M-NA	103040010	478	1X220 - 240 V~	0,92	0,55	0,75	4,2		7,4	6,9	6,2	5,6	4,1	3,2	1,8			2"	50	10m H07	16,3	24			
FEKA VS 550 T-NA	103040020	509	3X400 V~	0,90	0,55	0,75	1,64		7,4	6,9	6,2	5,6	4,1	3,2	1,8			2"	50	10m H07	16,3	24			
FEKA VS 750 M-A	103040040	504	1X220 - 240 V~	1,11	0,75	1	5,13		9,6	9,2	8,5	7,6	6,7	5,6	4,3	1,9		2"	50	10m H07	17,5	24			
FEKA VS 750 M-NA	103040050	498	1X220 - 240 V~	1,11	0,75	1	5,13		9,6	9,2	8,5	7,6	6,7	5,6	4,3	1,9		2"	50	10m H07	17,5	24			
FEKA VS 750 T-NA	103040060	534	3X400 V~	1,02	0,75	1	1,94		9,6	9,2	8,5	7,6	6,7	5,6	4,3	1,9		2"	50	10m H07	17,5	24			
FEKA VS 1000 M-A	103040080	562	1X220 - 240 V~	1,46	1	1,36	6,63		11,8	11,3	10,5	9,8	9,0	8,0	6,8	4,1		2"	50	10m H07	19,3	24			
FEKA VS 1000 M-NA	103040090	558	1X220 - 240 V~	1,46	1	1,36	6,63		11,8	11,3	10,5	9,8	9,0	8,0	6,8	4,1		2"	50	10m H07	19,3	24			
FEKA VS 1000 T-NA	103040100	590	3X400 V~	1,37	1	1,36	2,51		11,8	11,3	10,5	9,8	9,0	8,0	6,8	4,1		2"	50	10m H07	19,3	24			
FEKA VS 1200 M-A	103040120	600	1X220 - 240 V~	1,93	1,2	1,6	8,63		14	13,4	12,8	12,0	11,2	10,1	9,0	6,7	4	2"	50	10m H07	20,8	24			
FEKA VS 1200 M-NA	103040130	597	1X220 - 240 V~	1,93	1,2	1,6	8,63		14	13,4	12,8	12,0	11,2	10,1	9,0	6,7	4	2"	50	10m H07	20,8	24			
FEKA VS 1200 T-NA	103040140	621	3X400 V~	1,86	1,2	1,6	3,44		14	13,4	12,8	12,0	11,2	10,1	9,0	6,7	4	2"	50	10m H07	20,8	24			

Fiyatlara KDV dahil değildir.

FEKA BVP

SEWAGE PUMPS



Powerful submersible pumps for drainage and emptying duty.

Designed for pumping foul water containing solid particles of no more than 38 mm in diameter.

Anti-corrosion and anti-oxidation materials.

Motor with THERMAL

PROTECTION against overheating.

Wear-resistant motor shaft and impeller.

Excellent motor cooling to allow pump to run even when only partially submerged.

Automatic version equipped with float switch for automatic starting and stopping of the pump, and Manual version.

Equipped with power cable with plug, and 3-level union, without check valve.

Operating range

from 1 to 18 m³/h with head up to 12 metres.

Liquid temperature range

from 0 °C to +35 °C.

Pumped liquid

dirty water with maximum solid particle size 38 mm.

Max. immersion depth 7 metres.

MODEL	CODE	PRICE €	ELECTRICAL DATA						HYDRAULIC DATA																		DNM GAS	CABLE	WEIGHT KG	Q.TY x PALLET											
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	1	2	3	4,5	5	6	7	7,5	9	10	12	15	18																			
FEKA BVP 700 M-A	60122690	383	1X230 V~	1,0	0,70	0,95	4,6	Q=l/min	0	16,6	33,3	50	75	83,3	100	116,6	125	150	166,6	200	250	300	H (m)	10,5	10	9,9	9,5	8,9	8,8	8,1	7,8	7,5	7	6,1	5,1	4	1,5	1"½	10 mt.	8	27
FEKA BVP 750 M-A	60122691	411	1X230 V~	1,1	0,75	1	5,6	Q=l/min	0	16,6	33,3	50	75	83,3	100	116,6	125	150	166,6	200	250	300	H (m)	12	11,7	11,1	11	10,4	10,1	9,8	9,1	9	8,8	8	7	6	3,6	1"½	10 mt.	8	27

C8

DRENAG 1000 - 1200

SUBMERSIBLE PUMPS



Submersible electric pump in AISI 304 Stainless Steel: pump body, impeller, motor flange, filter and filter cover, motor casing, outer casing with handle, cable compartment cover.

Shaft in **AISI 316 stainless steel**.

Handle coated with insulating rubber. **Double mechanical seal** with oil chamber interposed, carbon/alumina on motor side and silicon/silicon carbide on pump side. **Dry motor**, asynchronous, watertight, cooled by the pumped liquid itself. Standard thermal protection in the winding. Capacitor permanently on in the single-phase version. 10 metres of H07RN-F power cables with schuko plug are supplied as a standard USA plug instead could be also available on request. All models can be supplied either with or without float.

Operating range

from 3 to 24 m³/h with head up to 14.2 mt.

Liquid temperature range

from 0°C to +35°C for domestic use.
from 0°C to +50°C.

Pumped liquid characteristics

rain water, phreatic water, sandy water from building yards and clean waste waters, not aggressive.

Maximum working temperature

+40°C with the motor out of the water.

Free passage through the suction grid 10 mm.

Maximum immersion depth 7 mt.

Protection level IP 68.

Insulation class F.

Installation fixed or portable, in a vertical position.

PANELS
PAG. 264

ACCESSORIES
PAG. 253

MODEL	CODE	PRICE €	ELECTRICAL DATA						HYDRAULIC DATA												DNM GAS	FREE PASSAGE mm	WEIGHT KG	Q.TY x PALLET					
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	0	3	6	9	12	15	18	24													
DRENAG 1000 M-A	103041000	895	1X230 V~	1,29	1	1,36	6	Q=l/min	0	50	100	150	200	250	300	400	H (m)	15,3	13,7	12,1	10,5	8,7	6,8	4,7	1"½	10	17	24	
DRENAG 1000 M-NA	103041010	866	1X230 V~	1,29	1	1,36	6	Q=l/min	0	50	100	150	200	250	300	400	H (m)	15,3	13,7	12,1	10,5	8,7	6,8	4,7	1"½	10	17	24	
DRENAG 1000 T-NA	103041020	859	3X400 V~	1,18	1	1,36	2,43	Q=l/min	0	50	100	150	200	250	300	400	H (m)	15,3	13,7	12,1	10,5	8,7	6,8	4,7	1"½	10	17	24	
DRENAG 1200 M-A	103041040	983	1X230 V~	1,85	1,2	1,6	7,5	Q=l/min	0	50	100	150	200	250	300	400	H (m)	17	15,4	13,8	12,4	10,7	9	7,3	3,3	1"½	10	18,5	24
DRENAG 1200 M-NA	103041050	950	1X230 V~	1,85	1,2	1,6	7,5	Q=l/min	0	50	100	150	200	250	300	400	H (m)	17	15,4	13,8	12,4	10,7	9	7,3	3,3	1"½	10	18,5	24
DRENAG 1200 T-NA	103041060	943	3X400 V~	1,65	1,2	1,6	3,24	Q=l/min	0	50	100	150	200	250	300	400	H (m)	17	15,4	13,8	12,4	10,7	9	7,3	3,3	1"½	10	18,5	24

A: automatic with float

NA: non automatic without float

T: three-phase

Fiyatlara KDV dahil değildir.

DRENAG FX

SUBMERSIBLE PUMPS FOR DRAINAGE OF SANDY WATER AND WATER FROM CONSTRUCTION SITE



DRENAG FX

Submersible pump for the draining clear water, groundwater or rainwater in commercial building service; the pumps is suitable for applications requiring with high head.

The pump is certified according to EN 12050-2 waste water regulation. Suitable for fixed installations with coupling device or mobile if placed directly on the bottom of the tank. The reduced dimensions and the outlet connection both flanged and threaded make it ideal for replacements. Designed for fast maintenance thanks to a construction solution that provides easy access to the main components of the pump. Open impeller and anti-wear rubber disc for use even in the presence of abrasive particles. Double mechanical seal in silicon carbide completely protected in an oil chamber and not in contact with the pumped liquid. Motor shaft in stainless steel AISI 431 for P2 <1,2 kW and AISI 304 for P2 > 1,5 kW, resin cable gland with quick coupling. Single-phase versions with integrated capacitor, available with float for automatic operation (MA) with powers up to 1,5 kW. In the three-phase versions the protection is the responsibility of the user.

ATEX version available for use in potentially explosive environments (ATES certifications: II2G Ex db IIB T4 GB o IEC EX: Ex db IIB T4 Gb).

Flow rate maximum 30,9 m³/h

Head up to 32 m

Type of pumped liquid clear water, rainwater and sandy water from construction site

Free passage 10 mm

Supported liquid temperature (max)

+50°C (+60°C for a short period of time)

+40°C for ATEX version

Flanged and threaded 1" 1/2, DN 32, DN 40

Impeller type Open

Class of protection IP 68

Motor insulation class F

Dry run time 10 min

Possible type of installation

Mobile if on the floor, fixed on the coupling

Special versions on request

Different cable length, different voltage



ONLINE TRAINING

REPLACEMENT
TABLE
PAG. 232

PANELS
PAG. 264

ACCESSORIES
PAG. 253

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA													DNM		FREE PASSAGE mm	WEIGHT KG	Q.TY x PALLET		
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h	Q=l/min													GAS				DN1	
					kW	HP			0	3	6	9	12	15	18	21	24	27	30								
DRENAG FX 15.07 MA	60191219	1.206	1x230V	1,1	0,8	1,1	5,1	H (m)	16,2	14,5	12,6	10,5	8,1	5,5	2,8							Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	35	6	
DRENAG FX 15.07 MNA	60191217	1.176	1x230V	1,1	0,8	1,1	5,1		16,2	14,5	12,6	10,5	8,1	5,5	2,8							Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	35	6	
DRENAG FX 15.07 TNA	60191218	1.147	3x400V	1	0,8	1,1	2,1		16,2	14,5	12,6	10,5	8,1	5,5	2,8							Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	35	6	
DRENAG FX 15.11 MA	60191239	1.324	1x230V	1,5	1,2	1,6	6,8		23,3	21,5	19,3	16,7	13,8	10,6	7,3	3,8							Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	35	6
DRENAG FX 15.11 MNA	60191237	1.294	1x230V	1,5	1,2	1,6	6,8		23,3	21,5	19,3	16,7	13,8	10,6	7,3	3,8							Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	35	6
DRENAG FX 15.11 TNA	60191238	1.265	3x400V	1,5	1,2	1,6	2,8		23,3	21,5	19,3	16,7	13,8	10,6	7,3	3,8							Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	35	6
DRENAG FX 15.15 MA	60191257	1.559	1x230V	2,3	1,8	2,4	10,6		26,4	24,9	23,1	21,1	18,9	16,6	14,2	11,8	9,5	7,4					Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	38	6
DRENAG FX 15.15 MNA	60191255	1.529	1x230V	2,3	1,8	2,4	10,6		26,4	24,9	23,1	21,1	18,9	16,6	14,2	11,8	9,5	7,4					Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	38	6
DRENAG FX 15.15 TNA	60191256	1.500	3x400V	2,5	1,8	2,4	4,3		26,4	24,9	23,1	21,1	18,9	16,6	14,2	11,8	9,5	7,4					Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	38	6
DRENAG FX 15.22 TNA	60191277	1.647	3x400V	3,1	2,3	3,1	5,2		31,8	30,0	28,2	26,3	24,3	22,1	19,8	17,4	14,8	12,0	9,0				Rp 1"1/2	DN32 PN10 / 6 DN40 PN6	10	39	6

in case of necessity please look at the replacement table at pag.232 for the correspondent old models.

ATEX VERSION

MODEL	CODE	PRICE €
DRENAG FX 15.07 MNA 220-240/50 EX	60194109	1.353
DRENAG FX 15.07 TNA 400/50 EX	60194110	1.319
DRENAG FX 15.11 MNA 220-240/50 EX	60194160	1.488
DRENAG FX 15.11 TNA 400/50 EX	60194161	1.454
DRENAG FX 15.15 MNA 220-240/50 EX	60194218	1.759
DRENAG FX 15.15 TNA 400/50 EX	60194219	1.725
DRENAG FX 15.22 TNA 400/50 EX	60194280	1.894

ATEX pumps are also available in IECEX version: code and price on request.

Fiyatlara KDV dahil değildir.

discover **FX** complete range
fx.dabpumps.com



GRINDER FX

SUBMERSIBLE PUMPS WITH CUTTING SYSTEM FOR SEWAGE



Submersible pump with shredder designed for lifting and transferring sewage water in commercial building service.

Grinder FX is certified for the European Union standard EN 12050-1 which applies to sewage lifting plants containing faecal material in buildings and construction sites.

Suitable for fixed installations with a coupling or mobile if the pumps is placed directly on the bottom of the tank. Thanks to the shredder, the pump is suitable for installations with small diameter pipes or installation that require high pressures. High strength shredding system in AISI 630 steel. Double mechanical seal in silicon carbide completely protected in oil bath and not in contact with the pumped liquid. Motor shaft in AISI 304 stainless steel, resin-fastened cable gland. The reduced overall dimensions and the outlet ports both flanged and threaded make it ideal for replacements. Maintenance is fast due to its design that allows easy access to the pump's main components. Single-phase versions with integrated capacitor, available with float for automatic operation (MA) with powers up to 1,5 kW. In the three-phase versions the protection is the user's responsibility.

ATEX version available for use in potentially explosive environments. (ATES certifications: II2G Ex db IIB T4 GB o IEC EX: Ex db IIB T4 Gb).

Flow rate maximum 19,8 m³/h

Head up to 33 m

Type of pumped liquid Loaded waters with filamentary bodies, paper or textile material

Supported liquid temperature (max)

+50°C (+60°C for a short period of time)

+40°C for ATEX version

Flanged and threaded

From 1"1/2, DN 32, DN 40

Impeller type Grinder

Class of protection IP 68

Motor insulation class F

Dry run time 10 min

Possible type of installation

Mobile on the ground or fixed on a coupling device

Special versions on request Different cable lengths, different voltages and frequencies



ONLINE TRAINING

REPLACEMENT
TABLE
PAG. 232

PANELS
PAG. 264

ACCESSORIES
PAG. 253

MODEL	CODE	PRICE €	ELECTRICAL DATA					HYDRAULIC DATA													DNM		WEIGHT KG	Q.TY x PALLET
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ /h													GAS	DN1		
					kW	HP		0	2,4	4,8	7,2	9,6	12	14,4	16,8	19,2								
GRINDER FX 15.07 MA	60191222	1.324	1x230V	1,1	0,8	1,1	5,3	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	35	6
GRINDER FX 15.07 MNA	60191220	1.294	1x230V	1,1	0,8	1,1	5,3	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	35	6
GRINDER FX 15.07 TNA	60191221	1.265	3x400V	1	0,8	1,1	2	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	35	6
GRINDER FX 15.11 MA	60191242	1.471	1x230V	1,5	1,1	1,5	6,8	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	35	6
GRINDER FX 15.11 MNA	60191240	1.441	1x230V	1,5	1,1	1,5	6,8	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	35	6
GRINDER FX 15.11 TNA	60191278	1.412	3x400V	1,5	1,1	1,5	2,8	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	35	6
GRINDER FX 15.15 MA	60191260	1.618	1x230V	2,2	1,6	2,1	9,8	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	38	6
GRINDER FX 15.15 MNA	60191258	1.588	1x230V	2,2	1,6	2,1	9,8	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	38	6
GRINDER FX 15.15 TNA	60191259	1.529	3x400V	2,1	1,6	2,1	3,8	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	38	6
GRINDER FX 15.22 TNA	60191279	1.676	3x400V	2,6	2,1	2,8	4,7	H (m)													Rp 1"1/2	DN32 PN10 / 6 DN40 Pn6	39	6

in case of necessity please look at the replacement table at pag.232 for the correspondent old models.

ATEX VERSION

MODEL	CODE	PRICE €
GRINDER FX 15.07 MNA 220-240/50 EX	60194119	1.488
GRINDER FX 15.07 TNA 400/50 EX	60194120	1.454
GRINDER FX 15.11 MNA 220-240/50 EX	60191241	1.657
GRINDER FX 15.11 TNA 400/50 EX	60194170	1.624
GRINDER FX 15.15 MNA 220-240/50 EX	60194226	1.826
GRINDER FX 15.15 TNA 400/50 EX	60194227	1.759
GRINDER FX 15.22 TNA 400/50 EX	60191280	1.928

Fiyatlara KDV dahil değildir.

discover **FX complete range**
fx.dabpumps.com



ATEX pumps are also available in IECEX version: code and price on request.

FEKA FXV

SUBMERSIBLE PUMPS FOR SEWAGE



FEKA FXV

Submersible pump for draining sewage water in commercial building service.

It is certified for the European Union standard EN 12050-1 which applies to sewage lifting containing faecal material in buildings and construction sites. Suitable for fixed installations with a coupling or mobile if the pump is placed directly on the bottom of the tank. High-performance super Vortex impeller with integral free passage. Double mechanical seal in silicon carbide completely protected in oil chamber and not in contact with the pumped liquid. Motor shaft in AISI 304 stainless steel, resin-fastened cable gland. The reduced overall dimensions and the outlet ports both flanged and threaded make it ideal for replacements. The pump is designed for quick maintenance thanks to a constructive solution that provides easy access to the main components of the pump.

Single-phase versions with integrated capacitor, available with float for automatic operation (MA) with powers up to 1,5 kW. In the three-phase versions the protection is the user's responsibility.

ATEX version available for use in potentially explosive environments. (ATES certifications: II2G Ex db IIB T4 GB o IEC EX: Ex db IIB T4 Gb).

Flow rate maximum 59,7 m³/h

Head up to 18,5 m

Type of pumped liquid Waters with filamentary bodies, paper or textile material in the presence of domestic or civil waste

Free passage

50 mm or 65 mm depending on the model

Supported liquid temperature (max)

+50°C (+60°C for a short period of time)

+40°C for ATEX version

Flanged and threaded From 2", DN 50, DN 65

Impeller type Vortex

Class of protection IP 68

Motor insulation class F

Dry run time 10 min

Possible type of installation

mobile when on the ground, fixed with coupling

Special versions on request Different cable lengths, different voltages and frequencies



ONLINE TRAINING

REPLACEMENT
TABLE
PAG. 232

PANELS
PAG. 264

ACCESSORIES
PAG. 253

FEKA FXV 20

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA								DNM		FREE PASSAGE	WEIGHT KG	Q.TY x PALLET			
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL		In A	Q=m ³ h Q=l/min	0	6	12	18	24	30	36	42				GAS	DN1	
					kW	HP																0
FEKA FXV 20.07 MA	60191210	1.029	1x230V	1,4	0,9	1,2	6,4	H (m)	11,7	10,9	9,6	7,7	5,4	2,9			Rp 2"	50 PN10/6	50	35	6	
FEKA FXV 20.07 MNA	60191208	1.000	1x230V	1,4	0,9	1,2	6,4		11,7	10,9	9,6	7,7	5,4	2,9			Rp 2"	50 PN10/6	50	35	6	
FEKA FXV 20.07 TNA	60191209	971	3x400V	1,4	0,9	1,2	2,4		11,7	10,9	9,6	7,7	5,4	2,9			Rp 2"	50 PN10/6	50	35	6	
FEKA FXV 20.11 MA	60191229	1.176	1x230V	1,7	1,2	1,6	8		13,1	12,9	11,9	10,1	7,7	4,8			Rp 2"	50 PN10/6	50	35	6	
FEKA FXV 20.11 MNA	60191227	1.147	1x230V	1,7	1,2	1,6	8		13,1	12,9	11,9	10,1	7,7	4,8			Rp 2"	50 PN10/6	50	35	6	
FEKA FXV 20.11 TNA	60191228	1.118	3x400V	1,6	1,2	1,6	2,9		13,1	12,9	11,9	10,1	7,7	4,8			Rp 2"	50 PN10/6	50	35	6	
FEKA FXV 20.15 MA	60194185	1.382	1x230V	2,3	1,7	2,3	10,5		16,2	15,6	14,4	12,6	10,4	7,7	4,7			Rp 2"	50 PN10/6	50	39	6
FEKA FXV 20.15 MNA	60194186	1.353	1x230V	2,3	1,7	2,3	10,5		16,2	15,6	14,4	12,6	10,4	7,7	4,7			Rp 2"	50 PN10/6	50	39	6
FEKA FXV 20.15 TNA	60191261	1.294	3x400V	2,2	1,7	2,3	4		16,2	15,6	14,4	12,6	10,4	7,7	4,7			Rp 2"	50 PN10/6	50	39	6
FEKA FXV 20.22 TNA	60191265	1.500	3x400V	2,9	2,2	2,9	5		18,5	18,0	17,1	15,9	14,3	12,2	9,7	6,6		Rp 2"	50 PN10/6	50	40	6

In case of necessity please look at the replacement table at pag.232 for the correspondent old models.

ATEX VERSION

MODEL	CODE	PRICE €
FEKA FXV 20.07 MNA 220-240/50 EX	60194085	1.150
FEKA FXV 20.07 TNA 400/50 EX	60194086	1.116
FEKA FXV 20.11 MNA 220-240/50 EX	60194135	1.319
FEKA FXV 20.11 TNA 400/50 EX	60194136	1.285
FEKA FXV 20.15 MNA 220-240/50 EX	60194187	1.556
FEKA FXV 20.15 TNA 400/50 EX	60194189	1.488
FEKA FXV 20.22 TNA 400/50 EX	60194248	1.725

discover **FX complete range**
fx.dabpumps.com



Fiyatlara KDV dahil değildir.

ATEX pumps are also available in IECEx version: code and price on request.

SELECTION TABLES

STATION, PUMP AND CONTROL PANELS

STATION MODEL	CODE	STATION PRICE €	PUMP MODEL	CODE	PRICE € FOR EACH PUMP	CONTROL PANEL MODEL	CODE	CONTROL PANEL PRICE €	CONTROL PANEL MODEL	CODE	CONTROL PANEL PRICE €
FEKAFOS 280 DOUBLE	60163426	1.554	FEKA VS 550 M-NA	103040010	478	E2D2M	60170021	956	EBOX PLUS D	60163217	792
			FEKA VS 550 T-NA	103040020	509	E2D2T	108320440	1.041			
			FEKA VS 750 M-NA	103040050	498	E2D2M	60170021	956			
			FEKA VS 750 T-NA	103040060	534	E2D2T	108320440	1.041			
			FEKA VS 1000 M-NA	103040090	558	E2D3M	60170025	1.011			
			FEKA VS 1000 T-NA	103040100	590	E2D3T	108320450	1.041			
			FEKA VS 1200 M-NA	103040130	597	E2D3M	60170025	1.011			
			FEKA VS 1200 T-NA	103040140	621	E2D3T	108320450	1.041			
			FEKA FXV 20.07 MNA	60191208	1.000	E2D3M	60170025	1.011			
			FEKA FXV 20.07 TNA	60191209	971	E2D3T	108320450	1.041			
			FEKA FXV 20.11 MNA	60191227	1.147	E2D3M	60170025	1.011			
			FEKA FXV 20.11 TNA	60191228	1.118	E2D3T	108320450	1.041			
			FEKA FXV 20.15 MNA	60194186	1.353	E2D4M	108320460	1.069			
			FEKA FXV 20.15 TNA	60191261	1.294	E2D3T	108320450	1.041			
			FEKA FXV 20.22 TNA	60191265	1.500	E2D5T	108320460	1.069			
			FEKA FXC 20.07 MNA	60191211	1.000	E2D2M	60170021	956			
			FEKA FXC 20.07 TNA	60191212	971	E2D1,5M	60170019	956			
			FEKA FXC 20.11 MNA	60191231	1.147	E2D3M	60170025	1.011			
			FEKA FXC 20.11 TNA	60191232	1.118	E2D3T	108320450	1.041			
			FEKA FXC 20.15 MNA	60191249	1.353	E2D3M	60170025	1.011			
			FEKA FXC 20.15 TNA	60191250	1.294	E2D3T	108320450	1.041			
			FEKA FXC 20.22 TNA	60191273	1.500	E2D5T	108320460	1.069			
			DRENAG FX 15.07 MNA	60191217	1.176	E2D2M	60170021	956			
			DRENAG FX 15.07 TNA	60191218	1.147	E2D2T	108320440	1.041			
			DRENAG FX 15.11 MNA	60191237	1.294	E2D3M	60170025	1.011			
			DRENAG FX 15.11 TNA	60191238	1.265	E2D3T	108320450	1.041			
			DRENAG FX 15.15 MNA	60191255	1.529	E2D4M	108320460	1.069			
			DRENAG FX 15.15 TNA	60191256	1.500	E2D5T	108320460	1.069			
			DRENAG FX 15.22 TNA	60191277	1.647	E2D5T	108320460	1.069			
			GRINDER FX 15.07 MNA	60191220	1.294	E2D3M	60170025	1.011			
			GRINDER FX 15.07 TNA	60191221	1.265	E2D3T	108320450	1.041			
			GRINDER FX 15.11 MNA	60191240	1.441	E2D3M	60170025	1.011			
GRINDER FX 15.11 TNA	60191278	1.412	E2D3T	108320450	1.041						
GRINDER FX 15.15 MNA	60191258	1.588	E2D4M	108320460	1.069						
GRINDER FX 15.15 TNA	60191259	1.529	E2D5T	108320460	1.069						
GRINDER FX 15.22 TNA	60191279	1.676	E2D5T	108320460	1.069						



FEKAFOS 280 DOUBLE

Tank, pump and control panel are supplied separately and must be ordered separately.

When selecting a control panel other than EBOX PLUS D, refer to the pump & control panel selection table in the EBOX section on pag. 259

Fiyatlara KDV dahil değildir.

BUZ MAKİNESİ İÇİN R5 SU ARITMA

Sağlıklı ve kaliteli buz üretmek için...



Küçük olması nedeni ile yer kaplamaz. Tezgah altına koyabilirsiniz. Şebeke suyunu sessizce sağlıklı suya çevirir. Günlük 500 galonluk su arıtma hacmi ile buz makineniz için gerekli temiz ve sağlıklı suyu kendiniz üretebilirsiniz.

Özellikler

Ebatı: 36.0L*14.2W*43.5H cm

Arıtma Suyu: 2 L/dk - İçme Suyu: 1.3 L/dk

Kapasitesi: 500 GPD

Filtrasyon Sistemi

Sediment Carbon Block Filter
Coconut Carbon Block Filter

Reverse Osmosis Membrane



İsterseniz buz makinenize isterseniz su sebiline bağlayın!

SIBA






EMPTYING/FILLING FUNCTION

Ideal for piloting the pumping stations of filling / emptying the drainage of rainwater or waste water in general.

- Operation with bulb floats or standard, max 5 (2/3 for operation, 2 for alarm)
- Operation with level trasducer (0-10V / 4...20mA)
- Exchange of the starting order of the pumps at every start, every 24 hours or at predefined intervals.



ACCESSORIES

DESCRIPTION		CODE	PRICE €
	FLOAT KEY	5 METERS	159260030 40
		10 METERS	159260040 66
		15 METERS	159260050 91
		20 METERS	159260070 113
	BULB-FLOAT	10 METERS	002718000 121
		20 METERS	002718001 166
	PRESSURE TRASDUCER 0-5 MT- CABLE 20 MT. FOR EBOX	60114675	288

DESCRIPTION		CODE	PRICE €
	KIT CAPACITOR 40UF	60169268	40
	KIT CAPACITOR 30UF	60169269	40
	KIT CAPACITOR 20UF	60169270	40
	FLASCHING 230V 5W 50/60 HZ EQUIPPED WITH A 5W INCANDESCENT BULB	60169271	115
	PRESS. TRAS. 16 BAR (FOR B. SETS WITH CONTR. PANEL EBOX)	60116837	148

Fiyatlara KDV dahil değildir.



DCONNECT DAB



DIVE YOURSELF IN THE FUTURE OF
WATER PRESSURIZATION

PULSAR

5" MULTISTAGE SUBMERSIBLE PUMPS



5" multi-impeller monobloc submersible pump designed for pressurization, gardening and irrigation and lifting water in residential building service. These pumps work immersed in wells and first collection tanks and cisterns. The suction takes place through a filter located in the lower part of the pump.

The motor is located above the hydraulic part and is cooled by the pumped liquid. Robust components allow the pump to run dry for short periods. Impellers and diffusers are in technopolymer. Double mechanical seal in carbon ceramic on motor side and silicon carbide/silicon carbide on pump side, with interposed oil chamber. Power cable, thermo-ampereometric protection and starting capacitor included in the single-phase version, also available in automatic version with float. Protection by the user in the three-phase version.

Operating range

from 0.9 to 7.2 m³/h with head up to 86 metres.

Maximum permissible sand quantity 50 g/m³

Motor protection level IP 68

Insulation class F

Liquid temperature range From 0° C to +40° C

Standard cables 20 m H07 RN F cable type.

Cable complete with SCHUKO plug EEC 7-VII-UNEL 47166-68 for the single-phase version.

Single-phase versions can be equipped with or without float switches for automatic operation.

MODEL	CODE	PRICE €	ELECTRICAL DATA				Q m ³ /h l/min	HYDRAULIC DATA								DNM GAS	WEIGHT KG	
			VOLTAGE 50 Hz	P1 kW	P2			In A	0	1,2	2,4	3,6	4,8	6	7,2			
					kW	HP												0
PULSAR 30/50 M-A	104160000	799	1x230 V~	0,94	0,55	0,75	4,5	42	38,2	33,8	24,8	13,5					1 1/4" G	17,3
PULSAR 30/50 M-NA	104160010	760	1x230 V~	0,94	0,55	0,75	4,5	42	38,2	33,8	24,8	13,5					1 1/4" G	16,7
PULSAR 30/50 T-NA	104160420	695	3x230 V~	0,87	0,55	0,75	2,85	42	38,2	33,8	24,8	13,5					1 1/4" G	17,3
PULSAR 30/50 T-NA	104160020	695	3x400 V~	0,87	0,55	0,75	1,65	42	38,2	33,8	24,8	13,5					1 1/4" G	17,3
PULSAR 40/50 M-A	104160030	834	1x230 V~	1,12	0,75	1	5,2	56	51	45	33	18					1 1/4" G	17,5
PULSAR 40/50 M-NA	104160040	797	1x230 V~	1,12	0,75	1	5,2	56	51	45	33	18					1 1/4" G	17
PULSAR 40/50 T-NA	104160450	732	3x230 V~	1,03	0,75	1	3,2	56	51	45	33	18					1 1/4" G	17,5
PULSAR 40/50 T-NA	104160050	732	3x400 V~	1,03	0,75	1	1,85	56	51	45	33	18					1 1/4" G	17,5
PULSAR 50/50 M-A	104160060	955	1x230 V~	1,45	1	1,36	6,5	72	65,5	58	43,6	24,5					1 1/4" G	18,5
PULSAR 50/50 M-NA	104160070	917	1x230 V~	1,45	1	1,36	6,5	72	65,5	58	43,6	24,5					1 1/4" G	18
PULSAR 50/50 T-NA	104160480	852	3x230 V~	1,35	1	1,36	4,15	72	65,5	58	43,6	24,5					1 1/4" G	18,5
PULSAR 50/50 T-NA	104160080	852	3x400 V~	1,35	1	1,36	2,4	72	65,5	58	43,6	24,5					1 1/4" G	18,5
PULSAR 65/50 M-A	104160090	1.030	1x230 V~	1,70	1,2	1,6	7,8	86	78,5	70	52,8	29					1 1/4" G	19,5
PULSAR 65/50 M-NA	104160100	990	1x230 V~	1,70	1,2	1,6	7,8	86	78,5	70	52,8	29					1 1/4" G	19
PULSAR 65/50 T-NA	104160510	926	3x230 V~	1,60	1,2	1,6	5	86	78,5	70	52,8	29					1 1/4" G	19,5
PULSAR 65/50 T-NA	104160110	926	3x400 V~	1,60	1,2	1,6	2,9	86	78,5	70	52,8	29					1 1/4" G	19,5
PULSAR 30/80 M-A	104160230	828	1x230 V~	1,12	0,75	1	5,2	47	45	42	36	30	21	12			1 1/4" G	17,5
PULSAR 30/80 M-NA	104160240	792	1x230 V~	1,12	0,75	1	5,2	47	45	42	36	30	21	12			1 1/4" G	17
PULSAR 30/80 T-NA	104160650	725	3x230 V~	1,03	0,75	1	3,2	47	45	42	36	30	21	12			1 1/4" G	17,5
PULSAR 30/80 T-NA	104160250	725	3x400 V~	1,03	0,75	1	1,85	47	45	42	36	30	21	12			1 1/4" G	17,5
PULSAR 40/80 M-A	104160260	948	1x230 V~	1,45	1	1,36	6,5	64	61	56,8	50	41,5	30,5	16,2			1 1/4" "	18,5
PULSAR 40/80 M-NA	104160270	911	1x230 V~	1,45	1	1,36	6,5	64	61	56,8	50	41,5	30,5	16,2			1 1/4" "	18
PULSAR 40/80 T-NA	104160680	847	3x230 V~	1,35	1	1,36	4,15	64	61	56,8	50	41,5	30,5	16,2			1 1/4" "	18,5
PULSAR 40/80 T-NA	104160280	847	3x400 V~	1,35	1	1,36	2,4	64	61	56,8	50	41,5	30,5	16,2			1 1/4" "	18,5
PULSAR 50/80 M-A	104160290	1.022	1x230 V~	1,70	1,2	1,6	7,8	77	73,2	68	60	50	37	19,6			1 1/4" "	19,5
PULSAR 50/80 M-NA	104160300	983	1x230 V~	1,70	1,2	1,6	7,8	77	73,2	68	60	50	37	19,6			1 1/4" "	19
PULSAR 50/80 T-NA	104160710	918	3x230 V~	1,60	1,2	1,6	5	77	73,2	68	60	50	37	19,6			1 1/4" "	19,5
PULSAR 50/80 T-NA	104160310	918	3x400 V~	1,60	1,2	1,6	2,9	77	73,2	68	60	50	37	19,6			1 1/4" "	19,5

matic with float **NA**= non automatic without float

Fiyatlara KDV dahil değildir.

RASYONEL FIRINLAR İÇİN R5 SU ARITMA

En doğru seçim...



Küçük olması nedeni ile yer kaplamaz. Tezgah altına koyabilirsiniz. Şebeke suyunu sessizce sağlıklı suya çevirir. Günlük 500 galonluk su arıtma hacmi rasyonel fırınınızın ihtiyacı olan kireçsiz, temiz ve sağlıklı suyu kendiniz üretebilirsiniz.

Özellikler

Ebatı: 36.0L*14.2W*43.5H cm

Arıtma Suyu: 2 L/dk - İçme Suyu: 1.3 L/dk

Kapasitesi: 500 GPD

Filtrasyon Sistemi

Sediment Carbon Block Filter
Coconut Carbon Block Filter

Reverse Osmosis Membrane



İsterseniz buz makinenize isterseniz rasyonel fırına bağlayın!

SIBA

DTRON 2

7" ELECTRONIC MULTISTAGE SUBMERSIBLE PUMPS



7" submersible electronic multi-impeller pump designed for use in water wells, tanks or cisterns. The pump is suitable for use in residential building service for pressurization, rainwater reuse and gardening and irrigation.

The pressure switch and flow switch integrated with the electronic board, make the pump completely automatic for the switching on/off and dry running protection. It integrates a double mechanical seal, a non return valve and a handle for ease transport and installation. Built with a innovative modular design: the hydraulic part, the motor, the electrical part and the filter can be disassembled separately, simplifying the maintenance activity.

The suction height is adjustable from the bottom up to 8 cm using the special accessory supplied as standard. A float can be connected without compromising the water tightness of the pump thanks to the NFC pocket. The integrated expansion vessel protect from water hammer, an additional expansion vessel is not required. The cable has a quick coupling for easier installation inside the tank/cistern.

The pump is also available in X version with 1" intake and kit X which includes 1 meter suction hose and float to prevent the suction of impurities from the bottom. The whole pump is classified as IP 68. With the accessory DOC68 (supplied separately) becomes a surface pump to be used under the water level.

* Certified version for drinking water is available on request.

Flow rate maximum 7,2 m³/h

Head up to 45 m

Maximum immersion depth 12 m

Type of pumped liquid Clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral

Free passage 2 mm

Liquid temperature range from +0°C to +50°C

Maximum immersion depth 15 m

Set cut-in 2,4 bar (+/-0,2)

Outlet connection Thread 1" 1/4

Pump maximum diameter 185 mm

Protection class IP 68

Motor insulation class F

Power cable (m) and plug 15 m with plug

Possible type of installation Fixed, horizontal or vertical. Submerged or semi-submerged. It can be installed on the surface, under the water level, or outside in a vertical position with the DOC68 accessory (supplied separately).

DTRON 2



ONLINE TRAINING



ACCESSORIES
PAG. 335

MODEL	CODE	PRICE €	ELECTRICAL DATA				HYDRAULIC DATA															WEIGHT KG	Q.TY x PALLET				
			VOLTAGE 50 Hz	P2		In A	Q=m ³ /h Q=l/min	0	0,7	1,2	1,8	2,4	3	3,6	4,2	4,8	5,4	6	6,3	6,6	7,3			7,5			
				P1 kW	kW			HP	0	11	20	30	40	50	60	70	80	90	100	105	110			122	125		
DTRON2 35/90	60195238	562	1 x 220-240 V	0,75	0,52	0,7	3,4		37,0	35,9	35,0	33,0	30,0	26,7	22,7	18,5	13,4	7,6	0,6							11,4	15
DTRON2 45/90	60188290	607	1 x 220-240 V	0,93	0,6	0,8	4,2	H (m)	45,0	43,0	41,2	38,0	34,2	29,7	24,7	20,0	15,0	9,0	2,5	0,6						11,4	15
DTRON2 35/120	60195251	607	1 x 220-240 V	0,9	0,6	0,8	4		38,0	37,6	36,3	34,0	31,5	28,9	26,0	23,2	20,0	16,3	12,0	9,8	7,5	2,2	0,7			11,4	15


X VERSION

MODEL	CODE	PRICE €
DTRON2 X 35/90	60195250	605
DTRON2 X 45/90	60195236	650
DTRON2 X 35/120	60195257	650
DTRON2 X 35/90 + 1m SUCTION KIT	60196488	802
DTRON2 X 45/90 + 1m SUCTION KIT	60196489	856
DTRON2 X 35/120 + 1m SUCTION KIT	60196490	856



DTRON 2
DIMENSIONS
ø 18,5 x 61 cm

discover **DTRON**
<https://dtron.dabpumps.com>



The photo is purely indicative, the accessory is supplied unassembled.

Fiyatlara KDV dahil değildir.

ESYBOX DIVER

7" MULTISTAGE SUBMERSIBLE PUMPS WITH VARIABLE FREQUENCY DRIVE



7" multi-stage electronic pump with variable frequency drive for clean water designed for use in wells, tanks or cisterns.

The pump can be used submerged, partially submerged or on the surface (with the DOC68 accessory, supplied separately).

The pump is suitable for pressurization, rainwater re-use and gardening and irrigation activities in residential building service. The pump integrates the variable frequency drive for operation according to the system requirements a non-return valve and a handle in stainless steel for transport. The electronic operation also protects against dry running and the VFD saves energy. The suction height is adjustable from the bottom up to 8 cm. It is possible to connect a float and a level sensor without compromising the water tightness of the pump thanks to the NFC (Near Field Communication) pocket. Equipped with expansion tank making the use of an additional expansion tank superfluous.

Wi-Fi connectivity as standard. The DConnect Box 2 is included, by downloading the DConnect app for Android or iOS you can control the pump from your smartphone.

The pump is available in X version with 1" inlet and X kit which includes 1 meter suction hose and float to prevent the suction of impurities from the bottom. The whole pump is IP 68 certified, it can be used on the surface (under head).

Flow rate maximum 7,2 m³/h

Head up to 55 m

Maximum immersion depth

12 m standard version

Type of pumped liquid Clean, free from solid or abrasive substances, non-viscous, non-aggressive, non-crystallized and chemically neutral

Free passage 2 mm

Liquid temperature range from
+0°C to +50°C

Maximum immersion depth 15 m

Set cut-in 2,4 bar (+/-0,2)

Outlet connection Thread 1" 1/4

Pump maximum diameter 185 mm

Protection class IP 68

Motor insulation class F

Power cable (m) and plug 15 m with plug

Possible type of installation Fixed, horizontal or vertical. Submerged or semi-submerged. It can be installed on the surface, under the water level, or outside in a vertical position with the DOC68 accessory (supplied separately).

esybox DIVER



ONLINE TRAINING

D CONNECT

PAG. 9

ACCESSORIES
PAG. 335

MODEL	CODE	PRICE €	ELECTRICAL DATA						HYDRAULIC DATA												WEIGHT KG	Q.TY x PALLET	
			VOLTAGE 50 Hz	P1 MAX kW	P2 NOMINAL kW	HP	In A	Q=m ³ /h	0	0,6	1,2	1,8	2,4	3,0	3,6	4,2	4,8	5,4	6	6,6			7,2
ESYBOX DIVER	60188296	1.377	1 x 220-240 V ~	1,3	0,95	1,3	5,5	H (m)	55	55	55	55	55	55	53	44	34	26	17	7,5		17	15

APPLICATIONS




Esybox Diver

Houses and small residential buildings up to 6 floors and a maximum of 9 apartments.*

*Indicative data. Please refer to the technical catalogue or DNA for correct sizing.


CERTIFICATIONS



SUITABLE FOR PUMPING WATER FROM:



TANKS



RAINWATER
COLLECTION TANKS



WELLS DOWN
TO 8 M DEEP

X VERSION

MODEL	CODE	PRICE €
ESYBOX DIVER X	60195078	1.420
ESYBOX DIVER X + 1m SUCTION KIT	60196494	1.550



ESYBOX DIVER
DIMENSIONS
ø 18,5 x 65 cm

discover **esybox LINE**
<https://esyboxline.com>



The photo is purely indicative, the accessory is supplied unassembled.

Fiyatlara KDV dahil değildir.

RUZIBOT

(Silme ve Kuru Temizleme)



Siz keyfinize bakın Ruzibot sizin temizlik kısmını halleder...

SIBA

GREE



*Yazın eviniz serin,
kışın sıcacık olsun...*



SIBA

**Çocuk Parkları Tasarımı
ve Uygulaması**



SİBA

CERTIFICATES



THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

CSQ/IMQ has issued an IQNet recognized certificate that the organization:

DWT HOLDING SPA
 VIA MARCO POLO 14 - 35036 MESTRINO (PD)
 BRENDOLA (VI) - CASTELLO DI GODEGO (TV) - BIENTINA (PS) -
 VAL LIGNA (VI) - FRC CHINA (VI) - HUNGARY

has implemented and maintains a
 Quality Management System
 for the following scope:
Design, production, sale and assistance of components and electronic controls for pumps, electro-pumps and pump sets for cold and hot water for civil, industrial and agricultural use

which fulfills the requirements of the following standard:
ISO 9001:2015

Issued on: **2018 - 05 - 21**
 Expires on: **2021 - 05 - 21**

This attestation is directly linked to the IQNet Partner's original certificate and shall not be used as a stand-alone document

Registration Number: IT - 824




Accredited by: IMQ and CISQ

* The label IQNet partner is valid at the time of issue of this certificate. Updated information is available online: www.iqnet-certification.com




ALLEGATO CERTIFICATO n. **9101.COGE**
 ANNEX CERTIFICATE

(*) Unità Operative
 (*) Operative Units

DAB PUMPS SPA
 VIA ROMANO PISANO 1 - 80021 BENTINA (PS)

DAB PUMPS SPA
 VIA DEL LAVORO 3 - 36040 VAL LIGNA (VI)

DAB PUMPS QINGDAO CO. LTD
 40 KATUD ROAD, QINGDAO DEVELOPMENT ZONE - SHANGDONG PROVINCE, PRC CHINA

DAB PUMPS HUNGARY KFT
 BUDA ERTEK H - 8200 MAGYAROKSA HUNGARY

DATA PERM. CERTIFICAZIONE 1999-07-17	ESPIRACIONE CERTIFICAZIONE 2018-05-21	ESPIRACIONE CERTIFICAZIONE 2021-05-21
---	--	--



IMQ **CISQ**

Accredited by: IMQ and CISQ

* The label IQNet partner is valid at the time of issue of this certificate. Updated information is available online: www.iqnet-certification.com




CERTIFICATO N. **9101.COGE**
 CERTIFICATE N. **9101.COGE**

SI CERTIFICA CHE IL SISTEMA QUALITÀ DI
 DWT HOLDING SPA (DWT) È IN CONFORMITÀ CON I REQUISITI DEL
DWT HOLDING SPA
 VIA MARCO POLO 14 - 35036 MESTRINO (PD)

IL SISTEMA OPERATIVO, OPERATIVE UNITS
DAB PUMPS SPA
 VIA MARCO POLO 14 - 35036 MESTRINO (PD)
DAB PUMPS SPA
 VIA ENNAUDI 2 - 36040 BRENDOLA (VI)
DAB PUMPS SPA
 VIA E. PERMO 6-B-12 - 31036 CASTELLO DI GODEGO (TV)

Visuali gli Allegati per le altre Unità Operative (1* 1 pagina)
 Visuali the Annexes for the other Operative Units (1* 1 page)

È CONFORME ALLA NORMA ISO 9001:2015
ISO 9001:2015

PER LE INFORMAZIONI ATTINENTI PER FARE RICHIEDERE CERTIFICAZIONE

Progettazione, produzione, commercializzazione e assistenza di componenti e controlli
 elettronici per pompe, elettropompe e gruppi di pompaggio per acqua fredda e calda
 ad uso civile, industriale ed agricolo
 Design, production, sale and assistance of components and electronic controls for pumps,
 electro-pumps and pump sets for cold and hot water for civil, industrial and agricultural use

IL PRESENTE CERTIFICATO È SUPOSTO AL RICONFIDAMENTO PER LA CERTIFICAZIONE DEL SISTEMA QUALITÀ
 THE PRESENT CERTIFICATE IS SUPOSTO TO THE CONFIDENCE IN THE CERTIFICATION BODY REGARDING THE
 REQUIREMENTS OF THE ISO 9001:2015 CERTIFICATION BODY

DATA PERM. CERTIFICAZIONE 1999-07-17	ESPIRACIONE CERTIFICAZIONE 2018-05-21	ESPIRACIONE CERTIFICAZIONE 2021-05-21
---	--	--



IMQ **CISQ**

Accredited by: IMQ and CISQ

* The label IQNet partner is valid at the time of issue of this certificate. Updated information is available online: www.iqnet-certification.com

Lefkoşa Mağaza
0 548 853 80 80

Mağusa Mağaza
+90 533 832 44 64

Girne Mağaza
+90 392 815 47 28

Karaođlanođlu Mağaza
+ 0 533 883 5858

Er÷lk÷ Mağaza
+90 548 811 40 40

Alsancak Depo
+90 533 870 03 01

www.sibastore.com



Karaođlanođlu Caddesi No.285, Karaođlanođlu - Girne / KKTC
+90 533 832 72 49 444 74 22 info@sibald.com