

Merkez Ofis

Karaođlanođlu Caddesi No.285, Karaođlanođlu - Girne / KKTC
Tel: +90 392 822 40 69 - +90 548 826 40 40

Merkez Showroom (Jakuzi)

Karaođlanođlu Cad. Paradise Court D.1, D.2 , D.3, Karaođlanođlu - Girne / KKTC
Tel: +90 533 883 58 58

Girne Őube

Yađmur Sok. Ersoy Plaza No:4-5 Bellapais KavŐađı Yanı - Girne / KKTC
Tel: +90 392 815 47 28 - +90 533 886 76 86

Erũlkũ Őube

Erũlkũ Sũpermarket - Minarelikŕy / KKTC
Tel: +90 548 811 40 05

Mađusa Őube

Hasan Barboçelli Sokak, Sakarya Bŕlgesi, Corner Park Apt. Dũkkan 1, Gazimađusa / KKTC
Tel: +90 533 832 44 64

LefkoŐa Őube

Osman Őrek Caddesi, Yapım İnŐaat Merkez Bina, Zemin Kat - LefkoŐa / KKTC
Tel: +90 548 853 80 80

www.sibaltd.com

SIBA

GENERAL CATALOGUE PVC PRODUCTS

SIBA

Kalite ve Gũven...

SIBA
Kalite ve Güven...

SIBA
Kalite ve Güven...



OUR BRANDS:

ARCHITECTURAL – DECORATIVE:



Exterior & Interior Cladding,
Pergola, Fencing, Profiles, Frames
and Cornices.



Skirting boards 50mm – 120mm
(for indoor and outdoor spaces).

MECHANICAL:



Diffuser System One Slot Grille
(Standard-Size or Custom
Orders).



Perimeter and Concealed
Nozzles (Standard-Size or
Custom Orders).



Diffuser System
(Standard-Size or Custom
Orders).



Modern Ventilation Systems.
A top-quality product for
every bathroom.



Complete Diffuser System.
Specially designed for
rooms.



Access Panels (Standard-Size or
Custom Sizes).

SIBA

PVC MATERIAL – GENERAL INFORMATION

Durable, Fire Resistant, Environmentally Friendly

- > Ideal for both outdoor and indoor use.
- > 100% waterproof; it does not rot.
- > Can accept any type of paint.
- > Excellent aesthetic result.
- > Recyclable product.
- > Easy and quick installation.
- > Lightweight material compared to plasterboard, metal, and steel.



Following the growing trend in the market for the use of "green" and sustainable materials, all PVC cut-offs are redirected to the factory for recycling and the production of new PVC sheets, allowing us to implement environmentally friendly projects.

Technical Specifications

Property	Test Method	Units	Value
Density	DIN 53479	g/cm ³	0.55
Hardness	DIN 53505	Shore 'D'	≥ 42
Water Absorption	DIN 53495	%	≤ 1.0
Tensile strength*	DIN 53455	MPa	≥ 15
Elongation at break**	DIN 53455	%	≥ 15
Modulus of elasticity	DIN 53457	MPa	900 - 1500
Impact strength Izod	ASTM D 256	KJ/ m ²	≥ 9.0
Impact strength Charpy	DIN 53253	KJ/ m ²	≥ 15
Flexural strength	DIN 53452	MPa	> 32
Compressive Strength at 10% Deformation	DIN 53421	MPa	> 6.5
Surface resistivity	ASTM D 257	Ω	> 1 × 10 ¹⁴
Volume resistivity	ASTM D 257	Ω-cm	> 1 × 10 ¹⁵
Dielectric Constant at 1 MHz	ASTM D 150	F/m	1.56
Dielectric strength	DIN 53481	KV / cm	≥ 90
Vicat softening temperature	DIN 53460	°C	≥ 73
Heat Defl ection temperature @ 1.8 MPa	DIN 53461	°C	58
Coeffi cient of Linear Expansion	DIN 53752	mm / m °C	0.08
Thermal conductivity	DIN 52616	W / m K	0.05
Flammability	EN 13501-1	FIGRA 0,2 (W/s) FIGRA 0,4 (W/s)	Class B
Smoke Production	EN 13501-1	SMOGRA (m ² /s)	Class s1
Flaming Droplets	EN 13823	pc	Class d0

* 15 MPa for free foam sheet with typical density 0.7 g/cc
* 13 MPa for free foam sheet with typical density 0.55 g/cc

** 15% for free foam sheet with typical density 0.7 g/cc
** 13% for free foam sheet with typical density 0.55 g/cc

DIMENSIONS

Available panels in various sizes and thicknesses
in black and white colours

Dimensions	122x244	125x250	122x300	150x250	150x300	200x250	200x300	250x300
Thickness								
3mm								
5mm			□					
8mm			□				□	
10mm	□	□	□		□		□	
12mm		□	□	□	□	□	□	□
13mm		□					□	
15mm	□	□	□		□		□	
18mm		□	□	□			□	□
25mm	□		□		□			
30mm	□							

PVC Panels Shades

PVC panels are available in a natural white colour.
*The PVC colour is not super white as it is recycled material. The colour shade of each panel may vary.

Painting

PVC material can be painted with any type of paint after applying plastic primer to the smooth surface of the panels.



Fire Specifications

Fire behaviour:	Class A1	(highest level)
	Class A2	(not burnable materials)
	Class B	(inflammable materials)
	Class C	(normal flammable materials)
	Class D	(normal flammable materials)
	Class E	(normal flammable materials)
Smoke development:	Class F	(not classified materials)
	Class S1	(Very limited smoke development)
	Class S2	(Limited smoke development)
	Class S3	(no demands on smoke development)
Burning droplets:	Class d0	(No burning droplets or particles)
	Class d1	(limited burning droplets)
	Class d2	(no demands on burning droplets)



The table below shows our main export countries standards and what test textile materials have passed

Country	Tested according to	Classification
EU	EN 13501-1	Class B-S1, d0
Germany	DIN EN 13501-1 DIN 4102	Class B-S1, d0 Class B1 (flame retardant)
Austria	ÖNORM EN 13501-1 ÖNORM b 3800	Class B-S1, d0 Q1 (limited smoke development)
Holland	NEN EN 13501-1	Class B-S1, d0
France	NFP 92501-1	M1 (Non-combustible)
England	BS 476, Part 6 MoD HH52/92	Class 1 (expected to pass) Passed
USA (Underwriters lab.)	NFPA 90A-1993	< 25 Smoke developed index < 50 Passed

PVC MATERIAL – GENERAL INFORMATION

Durable, Fire Resistant, Environmentally Friendly

- > Ideal for both outdoor and indoor use.
- > 100% waterproof; it does not rot.
- > Can accept any type of paint.
- > Excellent aesthetic result.
- > Recyclable product.
- > Easy and quick installation.
- > Lightweight material compared to plasterboard, metal, and steel.



Following the growing trend in the market for the use of "green" and sustainable materials, all PVC cut-offs are redirected to the factory for recycling and the production of new PVC sheets, allowing us to implement environmentally friendly projects.

Technical Specifications

Property	Test Method	Units	Value
Density	DIN 53479	g/cm ³	0.55
Hardness	DIN 53505	Shore 'D'	≥ 42
Water Absorption	DIN 53495	%	≤ 1.0
Tensile strength*	DIN 53455	MPa	≥ 15
Elongation at break**	DIN 53455	%	≥ 15
Modulus of elasticity	DIN 53457	MPa	900 - 1500
Impact strength Izod	ASTM D 256	KJ/ m ²	≥ 9.0
Impact strength Charpy	DIN 53253	KJ/ m ²	≥ 15
Flexural strength	DIN 53452	MPa	> 32
Compressive Strength at 10% Deformation	DIN 53421	MPa	> 6.5
Surface resistivity	ASTM D 257	Ω	> 1 × 10 ¹⁴
Volume resistivity	ASTM D 257	Ω-cm	> 1 × 10 ¹⁵
Dielectric Constant at 1 MHz	ASTM D 150	F/m	1.56
Dielectric strength	DIN 53481	KV / cm	≥ 90
Vicat softening temperature	DIN 53460	°C	≥ 73
Heat Defl ection temperature @ 1.8 MPa	DIN 53461	°C	58
Coeffi cient of Linear Expansion	DIN 53752	mm / m °C	0.08
Thermal conductivity	DIN 52616	W / m K	0.05
Flammability	EN 13501-1	FIGRA 0,2 (W/s) FIGRA 0,4 (W/s)	Class B
Smoke Production	EN 13501-1	SMOGRA (m ² /s)	Class s1
Flaming Droplets	EN 13823	pc	Class d0

* 15 MPa for free foam sheet with typical density 0.7 g/cc
* 13 MPa for free foam sheet with typical density 0.55 g/cc

** 15% for free foam sheet with typical density 0.7 g/cc
** 13% for free foam sheet with typical density 0.55 g/cc

DIMENSIONS

Available panels in various sizes and thicknesses
in black and white colours

Dimensions	122x244	125x250	122x300	150x250	150x300	200x250	200x300	250x300
Thickness								
3mm								
5mm			□					
8mm			□				□	
10mm	□	□	□		□		□	
12mm		□	□	□	□	□	□	□
13mm		□					□	
15mm	□	□	□		□		□	
18mm		□	□	□			□	□
25mm	□		□		□			
30mm	□							

PVC Panels Shades

PVC panels are available in a natural white colour.
*The PVC colour is not super white as it is recycled material. The colour shade of each panel may vary.

Painting

PVC material can be painted with any type of paint after applying plastic primer to the smooth surface of the panels.



Fire Specifications

Fire behaviour:	Class A1	(highest level)
	Class A2	(not burnable materials)
	Class B	(inflammable materials)
	Class C	(normal flammable materials)
	Class D	(normal flammable materials)
	Class E	(normal flammable materials)
Smoke development:	Class F	(not classified materials)
	Class S1	(Very limited smoke development)
	Class S2	(Limited smoke development)
	Class S3	(no demands on smoke development)
Burning droplets:	Class d0	(No burning droplets or particles)
	Class d1	(limited burning droplets)
	Class d2	(no demands on burning droplets)



The table below shows our main export countries standards and what test textile materials have passed

Country	Tested according to	Classification
EU	EN 13501-1	Class B-S1, d0
Germany	DIN EN 13501-1 DIN 4102	Class B-S1, d0 Class B1 (flame retardant)
Austria	ÖNORM EN 13501-1 ÖNORM b 3800	Class B-S1, d0 Q1 (limited smoke development)
Holland	NEN EN 13501-1	Class B-S1, d0
France	NFP 92501-1	M1 (Non-combustible)
England	BS 476, Part 6 MoD HH52/92	Class 1 (expected to pass) Passed
USA (Underwriters lab.)	NFPA 90A-1993	< 25 Smoke developed index < 50 Passed



BUILDING FACADE

Perforated, Unique Designs that make your building stand out



GREECE / ATHENS / 2022
EUROTERRA



HOW TO ORDER

SEND THE DRAWING

INCLUDE DIMENSIONS / FLOOR PLAN

REFERENCE THE DESIGN CODE FROM THE DESIGN PANELS CATALOGUE*

TECHNICAL PROPOSAL*

PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT

Advantages - Properties:

- 100% waterproof does not rot.
- Available panels in various sizes and thicknesses that can be customised to the required size for surface cladding.
- Perforated patterns can be selected from the Design Panels company catalogue or made-to-order.
- The panel can be installed directly on an existing masonry surface or with the use of a metal frame to keep a distance from the building.
- Painting is required (any type of paint can be used).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability in 5 sec.).
- Excellent aesthetic result.
- Recyclable product.
- Wind-resistant.
- Lightweight material.




GREECE / ATHENS / 2020
LEOCHARES LIFESTYLE APARTMENTS




GREECE / CRETE / 2020
PEPPER SEA CLUB



CYPRUS / LIMASSOL / 2022
CAPTAIN'S CABIN

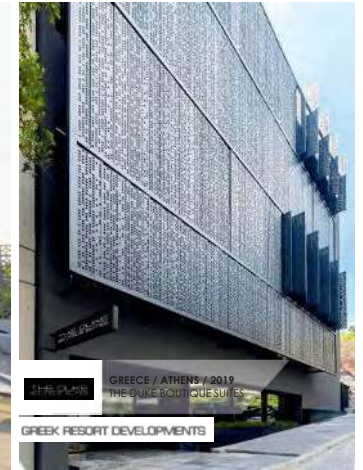

GREECE / ATHENS / 2019
THE GULE BOUTIQUE SUITES

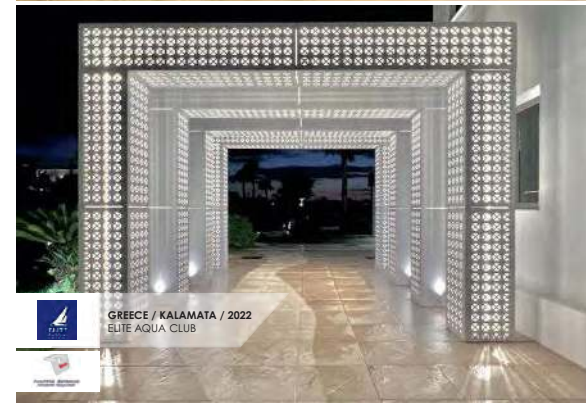

GREECE / KALAMATA / 2022
ELITE AQUA CLUB



GREECE / HALKIDIKI / 2020
MASOUTIS NIKITI



GREECE / POROS / 2022
BAR SEEN



CYPRUS / PAPHOS / 2022
CLIFF SOCIAL




- * For a custom design, please send us all the drawing
- * You will receive our proposal and the technical details of the metal construction

PVC gallery

NEW

PVC BREEZE BLOCK WALL

For the most demanding styles, there is the claustra option

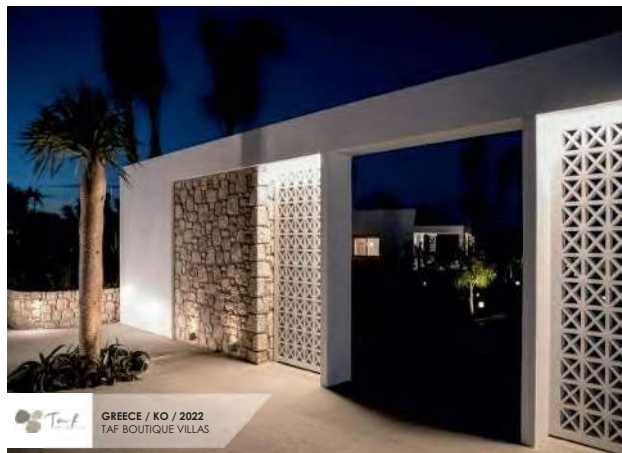

GREECE / KO / 2022
TAF BOUTIQUE VILLAS

Advantages - Properties:

- 100% waterproof does not rot.
- Option to choose from standard-size designs or made-to-order.
- It has the same appearance from both sides.
- Painting is required (any type of paint can be used).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability in 5 sec.).
- Excellent aesthetic result.
- Recyclable product.
- Wind-resistant.
- Lightweight material.



AIOAKOZ ATE GREECE / PAROS / 2023
VILLES PAROS



DESIGN & INTERIOR ARCHITECTURE GREECE / ALIMO / 2021
RESIDENCE



PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT

HOW TO ORDER

INCLUDE DIMENSIONS
HEIGHT - WIDTH
DEPTH

INTERIOR FRAME
DIMENSIONS
(SQUARE OR RECTANGLE)

SEND THE
PATTERN
CODE

FOR CUSTOM
ORDERS SEND THE
DRAWING


Advantages - Properties:

- 100% waterproof does not rot.
- Innovative design.
- Standard-size designs.
- Predetermined dimensions (maximum depth from ~6cm to ~13cm).
- In some designs, mounting bases with concealed lighting slots are available (LED strips are not available).
- Painting is required (any type of paint can be used).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability in 5 sec.).
- Excellent aesthetic result.
- Recyclable product.
- Lightweight material.

NEW

PVC PARAMETRIC WALL

Give your space a different and innovative style

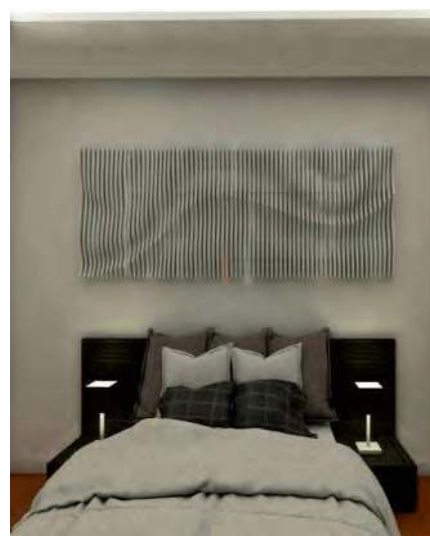

HOW TO ORDER


SEND THE CODE

FOR CUSTOM
ORDERS SEND THE
DRAWING

PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT

INTERIOR DECORATION

Can be used for cladding, walls, ceilings, columns, and as a separator

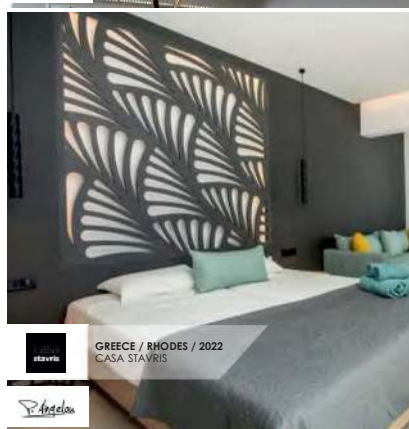

Advantages - Properties:

- 100% waterproof does not rot.
- Panels available in various sizes can be customised to fit the required size for surface cladding according to the overall dimensions.
- Perforated patterns can be made with a choice from our Design Panels catalogue or by order.
- Installation is done directly on an existing masonry or plasterboard surface using a metal frame to create a gap from the wall.
- Painting is required (any type of paint can be used).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability of 5 sec.).
- Excellent aesthetic result.
- Recyclable product.
- Lightweight material.

Advantages - Properties:

- 100% waterproof does not rot.
- Option to choose from standard-size designs or made-to-order.
- Can be applied to walls or ceilings.
- Installation is done directly on an existing surface, masonry, or plasterboard.
- Stucco and TFO tape are required for connecting PVC material and plasterboard.
- Painting is required (any type of paint can be used).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability in 5 sec.).
- Excellent aesthetic result.
- Recyclable product.
- Lightweight material.



PVC 13MM EMBOSSED WALL

The embossed surface that will aesthetically enhance your space



HOW TO ORDER

SEND THE DRAWING

INCLUDE DIMENSIONS

REFERENCE THE DESIGN CODE FROM THE DESIGN PANELS CATALOGUE*

TECHNICAL PROPOSAL*

PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT

- * For a custom design, please send us all the drawing
- * You will receive our proposal and the technical details of the metal construction

HOW TO ORDER

SEND THE DRAWING

IMPRESSION OF SURFACES

DIMENSIONS OF OPEN PLASTER BOARD SURFACE

REFERENCE THE DESIGN CODE FROM THE DESIGN PANELS CATALOGUE*

PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT

- * For a custom design, please send us all the drawing

PERGOLA

Add a modern and refined style to your space

Advantages - Properties:

- 100% waterproof does not rot.
- Perforated patterns can be made with a choice from our Design Panels catalogue or by order.
- Painting is required (can use any type of paint).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability of 5 sec.).
- Requires a metal frame for panel installation.
- Can be combined with other materials to create a waterproof or perforated surface.
- Easy and fast installation.
- Excellent aesthetic result.
- Recyclable product.
- Wind-resistant.
- Lightweight material.



HOW TO ORDER

SEND US THE DRAWING


INCLUDE DIMENSIONS

REFERENCE THE DESIGN CODE FROM THE DESIGN PANELS CATALOGUE*

TECHNICAL PROPOSAL*

PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT


* For a custom design, please send us all the drawing
* You will receive our proposal and the technical details of the metal construction

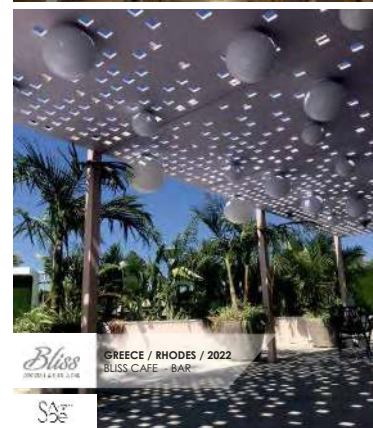

PROFILES

For external and internal use

Available sections:


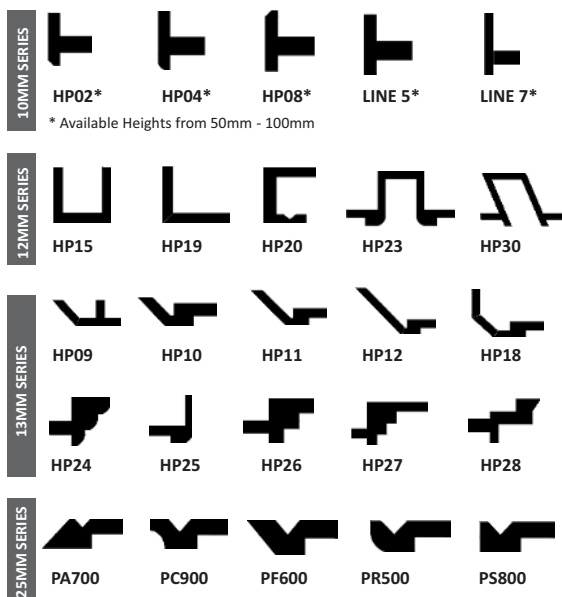


HOW TO ORDER → SEND THE CODE → INCLUDE DIMENSIONS (LINEAR METERS LM) → FOR CUSTOM ORDERS SEND THE DRAWING* → PVC MATERIAL MUST BE PAINTED STEP 1: PLASTIC PRIMER STEP 2: ANY TYPE OF PAINT

* For a custom order, please send us all the dimensions of the profile

Advantages - Properties:

- 100% waterproof does not rot.
- Various cuts available, as well as required dimensions by order.
- Fire-resistant material (self-extinguishing ability of 5 sec.).
- Excellent finish when combined with plasterboard.
- Engraving for LED lighting can be added.
- Requires Stucco and TFO tape for connecting PVC and plasterboard material.
- Painting is required (can use any type of paint).
- No maintenance is required after installation.
- Easy and fast installation.
- Recyclable product.
- Low cost.
- Lightweight material.





Advantages - Properties:

- 100% waterproof does not rot.
- Suitable for external and internal use.
- Painting is required (any type of paint can be used).
- Various cuts are available, as well as required dimensions by order.
- Fire-resistant material (self-extinguishing ability of 5 sec.).
- Excellent finish when combined with plasterboard.
- Engraving for LED lighting can be added.
- Easy and fast installation (placed on a straight surface, with silicone or glue)
- Recyclable product.
- Low cost.
- Lightweight material.

CORNICES

Available sizes & designs

Made by Drilling Tools

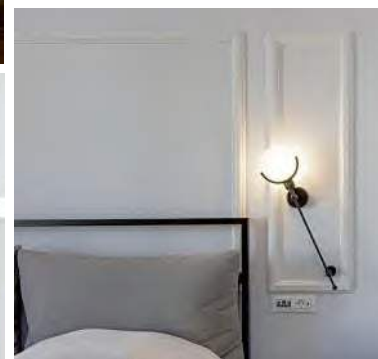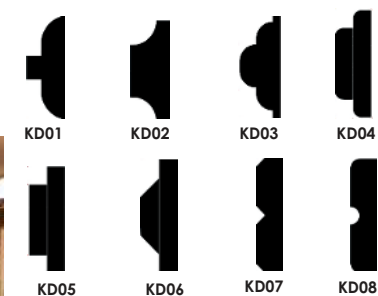

HOW TO ORDER → SEND THE CODE → INCLUDE DIMENSIONS (LINEAR METERS LM) → FOR CUSTOM ORDERS SEND THE DRAWING* → PVC MATERIAL MUST BE PAINTED STEP 1: PLASTIC PRIMER STEP 2: ANY TYPE OF PAINT

* For custom orders with drilling tools, please provide us with all the dimensions (sections) of the cornice

PVC gallery

FENCING

TYPE A



Advantages - Properties:

- 100% waterproof does not rot.
- Perforated patterns can be made with a choice from our Design Panels catalogue or by order.
- Painting is required (can use any type of paint).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability of 5 sec.).
- Includes application accessories.
- Both sides have the same appearance.
- Easy and fast installation.
- Excellent aesthetic result.
- Maximum height is 150cm and the maximum width is 100cm.
- Recyclable product.
- Wind-resistant.
- Lightweight material.



CYPRUS / LIMASSOL / 2023
RESIDENCE



SOLEADO LUXURY VILLAS
GREECE / HALKIDIKI / 2021



CYPRUS / LIMASSOL / 2017
ZEUS RESIDENCE



GREECE / THASOS / 2020
BLUE DREAM PALACE HOTEL




CYPRUS / PAPHOS / 2020
APHRODITE HILLS

HOW TO ORDER → SEND THE DRAWING → INCLUDE DIMENSIONS (HEIGHT) → INCLUDE DIMENSIONS (LINEAR METERS LM) → CORNERS → REFERENCE THE DESIGN CODE FROM THE DESIGN PANELS CATALOGUE* → PVC MATERIAL MUST BE PAINTED STEP 1: PLASTIC PRIMER STEP 2: ANY TYPE OF PAINT

* For a custom design, please send us all the drawing

Advantages - Properties:

- 100% waterproof does not rot.
- Perforated patterns can be made with a choice from our Design Panels catalogue or by order.
- Painting is required (can use any type of paint).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability of 5 sec.).
- Requires a metal frame for panel installation.
- Can be applied on one or both sides.
- Easy and fast installation.
- Excellent aesthetic result.
- Adjustable height.
- Recyclable product.
- Wind-resistant.
- Lightweight material.



Unique and Prototype Fences

FENCING

TYPE B



GREECE / KO / 2023
KYMA MARE DUNES RESORT



GREECE / RHODES / 2022
CASA STAVRIS

HOW TO ORDER → SEND THE DRAWING → INCLUDE DIMENSIONS → REFERENCE THE DESIGN CODE FROM THE DESIGN PANELS CATALOGUE* → TECHNICAL PROPOSAL* → PVC MATERIAL MUST BE PAINTED STEP 1: PLASTIC PRIMER STEP 2: ANY TYPE OF PAINT

* For a custom design, please send us all the drawing
* You will receive our proposal and the technical details of the metal construction

C2020

CANYON LINE BY VENTUS AIR CEILING

Diffuser System - One Slot Grille

- > Straight, Slot Line, Corner, or Curved.
- > Excellent aesthetic result.
- > Suitable for cooling applications, and heating applications *up to 65°C.
- > Easy finishing process.
- > High performance with large air volumes.
- > Low noise levels.





Exterior & Interior Use Skirtings

Available sections:

Advantages - Properties:

- 100% waterproof does not rot.
- Various cuts are available, as well as tailored dimensions upon request, depending on thickness and height.
- Can be engraved for LED lighting.
- Requires painting (can be used with any type of paint).
- No maintenance is required after installation.
- Fire-resistant material (self-extinguishing ability in 5 seconds).
- Easy and quick installation (adheres to a smooth surface with glue or silicone).
- Excellent aesthetic result.
- Recyclable product.
- Lightweight material.
- Low cost.

Simple Skirting

CODE: T01

H 50mm - 120mm
W 10mm, 12mm, 15mm & 18mm

CODE: T02

H 50mm - 120mm
W 12mm, 15mm & 18mm

CODE: T03

H 50mm - 120mm
W 12mm, 15mm & 18mm

CODE: V01

H 50mm - 120mm
W 12mm, 15mm & 18mm

Designer Skirting

CODE: T04

H 50mm - 120mm
W 10mm, 12mm, 15mm & 18mm

CODE: T07

H 70mm - 120mm
W 18mm

CODE: T08

H 50mm - 120mm
W 18mm

Light Skirting

CODE: T05

H 50mm - 120mm
W 18mm

CODE: T06

H 50mm - 120mm
W 18mm

CODE: TE01

H 70mm - 120mm
W 28mm

ArchLine Skirting

CODE: AT01

H 50mm - 120mm
W 13mm

CODE: AT02

H 50mm - 120mm
W 13mm

HOW TO
ORDER

SEND THE
CODE

INCLUDE
DIMENSIONS
(HEIGHT)

INCLUDE
THICKNESS

INCLUDE
DIMENSIONS
(LINEAR METERS LM)

FOR CUSTOM
ORDERS SEND THE
DRAWING*

PVC MATERIAL MUST BE PAINTED
STEP 1: PLASTIC PRIMER
STEP 2: ANY TYPE OF PAINT

* For skirting boards with LED engraving, we will need the exact dimensions of the aluminum profile




C2020

CANYON LINE BY VENTUS AIR VERTICAL

Diffuser System - One Slot Grille

Straight or Curved

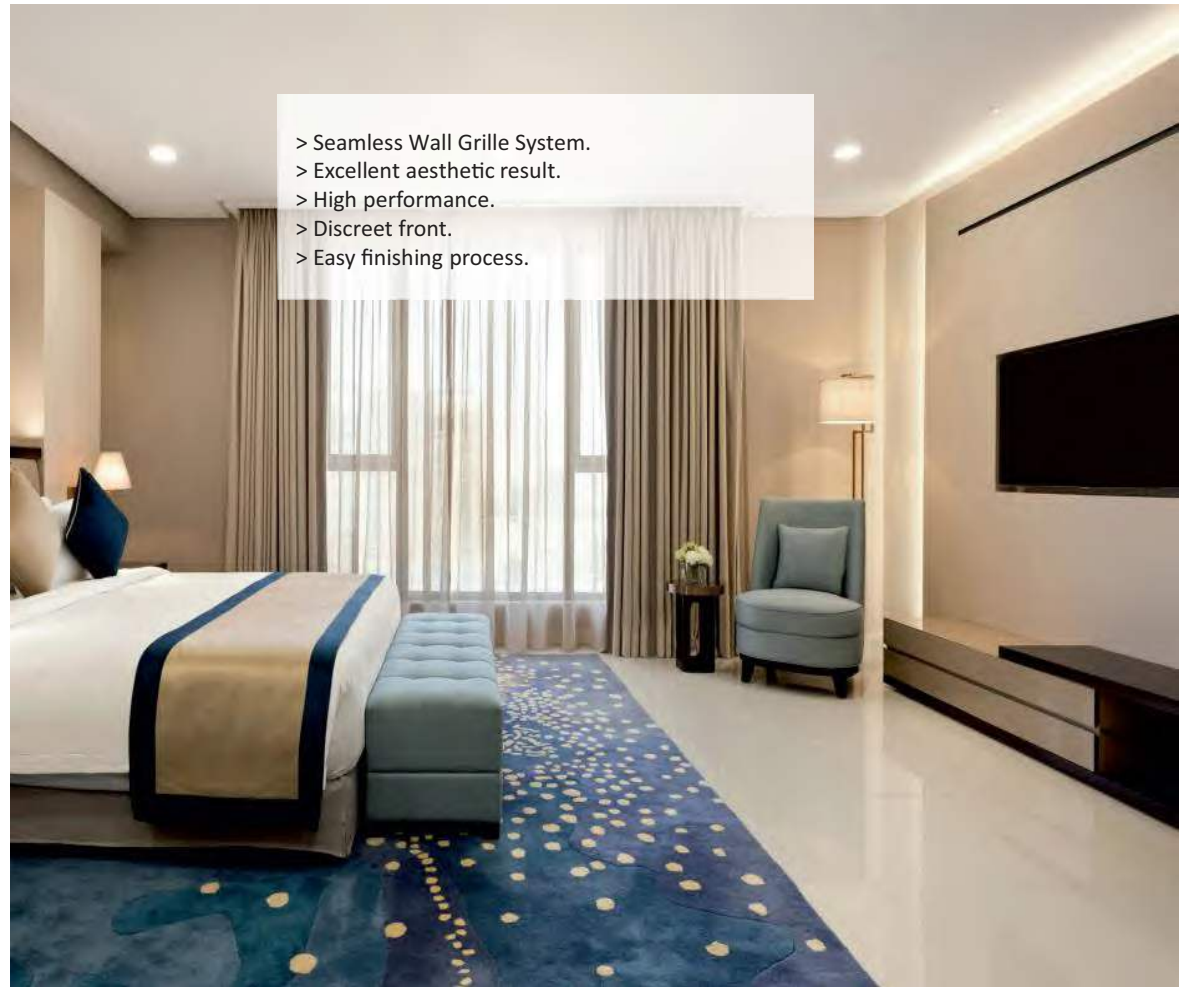

C2020 INSTALLATION PROCESS




CUSTOM MADE

YOU DESIGN IT WE BUILD IT

We take pride in our ability to offer our customers custom-designed products tailored to their needs.

ORDER PROCESS

For any custom design order, please attach drawings with all necessary information (dimensions, depth, plenum box, nozzle position and dimensions, etc.).

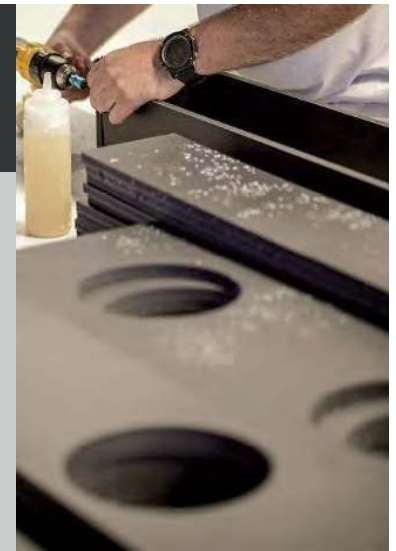


NEW CAMOUFLAGE

A new series of Invisible Air Ventilation System

Visit the webpage www.camouflage.cy to view the detailed installation video

- ✓ It is placed circumferentially around the wall.
- ✓ Non-visible.
- ✓ Perimeter Grille.
- ✓ Standard-size or custom-made-to-order.
- ✓ Elegant and Aesthetic Result.
- ✓ 100% waterproof material that does not rot.
- ✓ Fire-resistant material (self-extinguishing ability in 5 seconds).

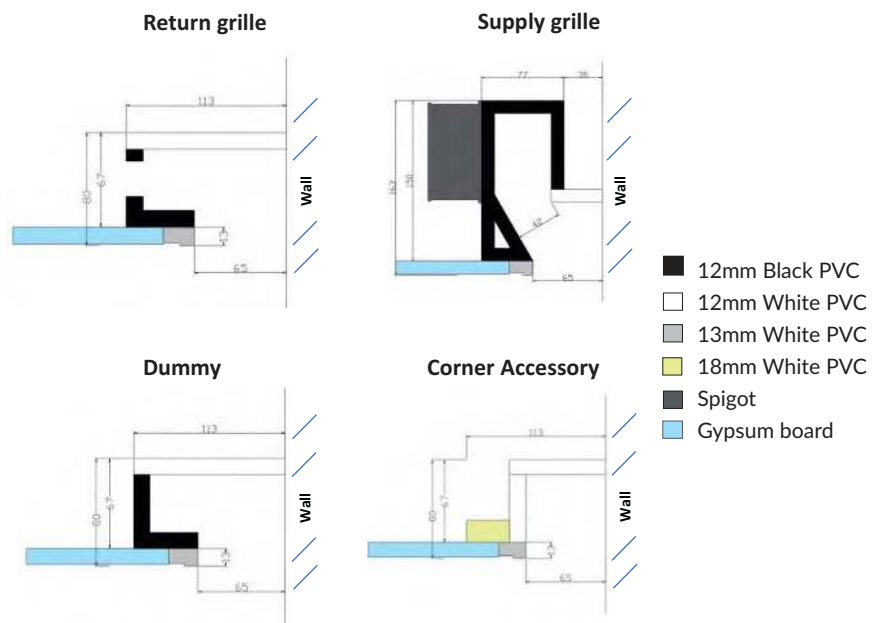



VENTUS
CUSTOM AIR TECHNOLOGIES

Ventus Air Technologies specialises in designing and manufacturing PVC Grilles and Diffusers through its cutting-edge facilities.

The company produces high-quality products and unique constructions using modern equipment and highly skilled personnel.

We offer innovative, modern-design products at competitive prices, fast delivery times, and a high level of service.



**A/C & GRILLE
PLENUM BOXES**

**FLEXIBLE
DUCTS**

3D Virtual
Take a walk around our Ventus Lab
www.ventusair.eu





WCvent manufactures wc extractor made from PVC material that seamlessly blends with your bathroom environment. With superior quality, no finishing, and recyclable materials, these exclusive products can be ordered in standardised sizes or customised to fit the specific needs of your project

- ✔ Elegant and high-aesthetic result.
- ✔ Fire-resistant material (self-extinguishing ability in 5 seconds).
- ✔ 100% waterproof material that does not rot.
- ✔ Suitable for any type of paint.
- ✔ Recyclable material, low-cost.
- ✔ Easy and quick installation.



Top-quality product for every bathroom.

The unique design of our products delivers a minimalist result that seamlessly integrates with your bathroom environment, just as it should be.




BATHROOM VENTILATION

Our range of geometric shapes.




Line



Square



Ellipse



Circle



Complete Air System



- ① Choose Grille ② Choose Flexible ③ Choose Plenum Box



The All-in-One Solution

ProAirKit systems are specially designed for rooms in hotels and apartments. This is the most complete air solution on the market.

Ceiling Access Panels



Standard Size Access Panel A:100

- Large stock availability.
- Lightweight product and easy to install.
- Does not include any easy-to-break mechanisms.
- Remains aligned with the plasterboard.
- Opens from any side.
- Waterproof.
- No compound is required.
- Competitive pricing.




Custom Size Access Panels A:100

- Customisable dimensions.
- Lightweight and easy to install.
- Does not include any easy-to-break mechanisms.
- Remains aligned with the plasterboard.
- Opens from any side.
- Waterproof.
- No compound is required.
- Ability to manufacture larger openings.
- Competitive pricing.



Corridor Access Panel A:100

- Customisable dimensions.
- Lightweight product and easy to install.
- Does not include any easy-to-break mechanisms.
- Remains aligned with the plasterboard.
- Opens from any side.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Easy and direct access to all points.
- Custom openings can be created for mechanical or decorative purposes upon request.



Corridor Access Panel Without A:100

- Customisable dimensions.
- Lightweight product and easy to install.
- Does not include any easy-to-break mechanisms.
- Remains aligned with the plasterboard.
- Opens from any side.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Easy and direct access to all points.
- Custom openings can be created for mechanical or decorative purposes upon request.

Certified & Tested

Wall-mounted Access Panels




Standard Size Access Panel (With Springs) B:800

- Large stock availability.
- Lightweight product and easy to install.
- Remains aligned with the plasterboard.
- Opens from any side.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Specialised tool required for access, due to safety reasons.



Custom Size Access Panels (With Springs) B:800

- Customisable dimensions.
- Lightweight product and easy to install.
- Does not include any easy-to-break mechanisms.
- Remains aligned with the plasterboard.
- Opens from any side.
- Waterproof.
- No compound is required.
- Competitive pricing.
- A specialised tool is required for access due to safety reasons.



Removable With Universal Lock B:800

- Customisable dimensions.
- Lightweight product and easy to install.
- Does not include any easy-to-break mechanisms.
- Remains aligned with the plasterboard.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Comes with a universal lock.

Pvc Frame Access Panels



Pvc Frame With Push Button

- Customisable dimensions.
- Lightweight product and easy to install.
- Remains aligned with the plasterboard.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Suitable for installation on brick walls, plasterboard.



Pvc Frame With Universal Lock

- Customisable dimensions.
- Lightweight product and easy to install.
- Remains aligned with the plasterboard.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Suitable for installation on brick walls, thermal facades, plasterboard.



Pvc Frame With Heavy Duty Hinges

- Customisable dimensions.
- Lightweight product and easy to install.
- Remains aligned with the plasterboard.
- Waterproof.
- No compound is required.
- Competitive pricing.
- Suitable for installation on brick walls, plasterboard.
- Can be covered with tiles, glass, wood, etc.

For more information on our Access Panels, visit our website www.easyax.com or call us on (+357) 25 828 114